

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

REQUEST FOR FILING APPLICATION

Under Rule 53(a), (b) & (f)

(No Filing Fee or Oath/Declaration)

(Do NOT use for Provisional or PCT Applications)

Use for Design or Utility Applications

PATENT
APPLICATION

RULE 53(f) NO DECLARATION

Assistant Commissioner of Patents

Atty. Dkt.

PM 272721

T4HW-

98S0669P1

and Trademarks

M#

Client Ref

Washington, DC 20231

Date:

August 11, 2000

Sir:

1. This is a Request for filing a new Patent Application (☐ Design ☒ Utility) entitled:2. (Complete) Title: **INFORMATION STORAGE MEDIUM HAVING MULTIPLE INFORMATION LAYERS
AND MULTI-PURPOSE INFORMATION PROCESSING APPARATUS**without a filing fee or Oath/Declaration but for which is enclosed the following:3. ☒ Abstract 1 page(s).4. 87 Pages of Specification (only spec. and claims); 5. ☐ Specification in non-English language6. 11 Numbered claim(s); and7. ☒ Drawings: 36 sheet(s) ☐ 1 set informal; 8. ☒ formal of size: ☒ A4 ☐ 11"9. **DOMESTIC/INTERNATIONAL** priority is claimed under 35 USC 119(e)/120/365(c) based on the following provisional, nonprovisional and/or PCT international application(s):

Application No.	Filing Date	Application No.	Filing Date
(1) PCT/JP99/00620	12 FEB 1999	(2)	
(3)		(4)	
(5)		(6)	

10. **FOREIGN** priority is claimed under 35 USC 119(a)-(d)/365(b) based on filing in JAPAN

Application No.	Filing Date	Application No.	Filing Date
(1) 10-030245	12 FEB 1998	(2)	
(3)		(4)	
(5)		(6)	

11. (No.) Certified copy (copies): ☐ attached; ☐ previously filed (date)
in U.S. Application No. / filed on 12. ☐ This is a reissue of Patent No. 13. ☒ See top first page re prior Provisional, National, International application(s) (X box only if info is there and do not complete corresponding item 14 or 15.)14. ☐ **Amend the specification** by inserting before the first line -- This is a ☐ Continuation-in-Part
☐ Divisional ☐ Continuation ☐ Substitute Application (MPEP 201.09) of:14(a) ☐ National Appln. No. / filed -- (M#)14(b) ☐ International Appln. No. PCT/ filed which designated the U.S. --15. ☐ **Amend the specification** by inserting before the first line: --This application claims the benefit of U.S. Provisional Application No. 60/ , filed --16. Extension to date: ☐ concurrently filed ☐ not needed ☐ previously filed

17. ☐ Prior application is assigned to

by Assignment recorded _____ Reel _____ Frame _____

18. ☒ Attached: Front Page of WO99/41749, International Search Report and Form PTO-1449 listing the enclosed documents

19. This application is made by the following named inventor(s) (Double check instructions for accuracy.):

(1) Inventor	Hideo	ANDO	
Residence	Tokyo	Japan	Japan
Post Office Address (include Zip Code)	890-1-205, Arai, Hino-shi, Tokyo, Japan 191-0022		

(2) Inventor	Seigo	ITO	
Residence	Hanno-shi	Japan	Japan
Post Office Address (include Zip Code)	471-13, Nakatonakago, Hanno-shi, Saitama-ken, Japan 357-0122		

(3) Inventor	Hiromichi	KOBORI	
Residence	Yokohama-shi	Japan	Japan
Post Office Address (include Zip Code)	69-29-B1, Sachigaoka, Asahi-ku, Yokohama-shi, Kanagawa-ken, Japan 241-0822		

(4) Inventor	Naobumi	SEO	
Residence	Yokohama-shi	Japan	Japan
Post Office Address (include Zip Code)	334-1-405, Nobacho, Konan-ku, Yokohama-shi, Kanagawa-ken, Japan 234-0056		

(5) Inventor	Hiroaki	UNNO	
Residence	Yokohama-shi	Japan	Japan
Post Office Address (include Zip Code)	1-104, Mameguchidai, Naka-ku, Yokohama-shi, Kanagawa-ken, Japan 231-0838		

20. NOTE: FOR ADDITIONAL INVENTORS, check box ☒ and attach sheet with same information regarding additional inventors.


Pillsbury Madison & Sutro LLP
Intellectual Property Group

1100 New York Avenue, NW.
Ninth Floor
Washington, DC 20005-3918
Tel: (202) 861-3000
Atty/Sec: DSL/sdm

By: Atty: Dale S. Lazar

Reg. No. 28872

Sig:

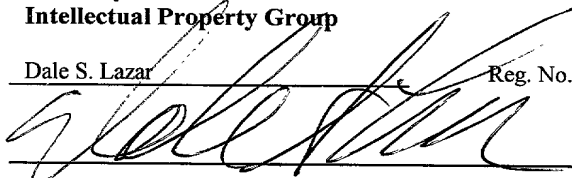

Fax: (202) 822-0944
Tel: (202) 861-3527

NOTE: File in duplicate with 2 post card receipts (PAT-103) & attachments

REQUEST FOR FILING APPLICATION
Under Rule 53(a), (b)(I) & (d)(I)
(Continued : Additional Inventors)

(6) Inventor	Hisashi		YAMADA
	First	Middle Initial	Family Name
Residence	Yokohama-shi	Japan	Japan
	City	State/Foreign Country	Country of Citizenship
Post Office Address	2709-3, Totsukacho, Totsua-ku, Yokohama-shi, Kanagawa-ken, Japan		
(include Zip Code)	244-0003		

(7) Inventor	Hiroharu		SATOH
	First	Middle Initial	Family Name
Residence	Tokyo	Japan	Japan
	City	State/Foreign Country	Country of Citizenship
Post Office Address	4-7-4-401, Hongo, Bunkyo-ku, Tokyo, Japan		
(include Zip Code)	113-0033		

(8) Inventor	Koji		MARUYAMA
	First	Middle Initial	Family Name
Residence	Yokohama-shi	Japan	Japan
	City	State/Foreign Country	Country of Citizenship
Post Office Address	4-1-18-301, Ooka, Minami-ku, Yokohama-shi, Kanagawa-ken, Japan		
(include Zip Code)	232-0061		

(9) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(10) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(11) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(12) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

APPLICATION UNDER UNITED STATES PATENT LAWS

Atty. Dkt. No. PM 272721
(M#)

Invention: INFORMATION STORAGE MEDIUM HAVING MULTIPLE INFORMATION LAYERS AND
MULTI-PURPOSE INFORMATION PROCESSING APPARATUS

Inventor (s): ANDO, Hideo
ITO, Seigo
KOBORI, Hiromichi
SEO, Naobumi
UNNO, Hiroaki
YAMADA, Hisashi
SATO, Hiroharu
MARUYAMA, Koji

Pillsbury Madison & Sutro LLP
Intellectual Property Group
1100 New York Avenue, NW
Ninth Floor
Washington, DC 20005-3918
Attorneys
Telephone: (202) 861-3000

This is a:

- ☐ Provisional Application
- ☐ Regular Utility Application
- ☒ Continuing Application
 - ☒ The contents of the parent are incorporated by reference
- ☐ PCT National Phase Application
- ☐ Design Application
- ☐ Reissue Application
- ☐ Plant Application
- ☐ Substitute Specification
Sub. Spec. Filed _____
in App. No. _____ / _____
- ☐ Marked up Specification re
Sub. Spec. filed _____
In App. No. _____ / _____

TITLE OF THE INVENTION
INFORMATION STORAGE MEDIUM HAVING MULTIPLE INFORMATION
LAYERS AND MULTI-PURPOSE INFORMATION PROCESSING
APPARATUS

5 CROSS-REFERENCE TO RELATED APPLICATIONS

This is a Continuation of Application
PCT/JP99/00620, filed February 12, 1999.

This application is based upon and claims the
benefit of priority from the prior Japanese Patent
10 Application No. 10-030245, filed February 12, 1998, the
entire contents of which are incorporated herein by
reference.

BACKGROUND OF THE INVENTION

The present invention relates to an information
15 storage medium having multiple information layers and
a multi-purpose information processing apparatus,
which are effective in use in a recording/reproducing
apparatus for DVD (Digital Video Disk), a transmitting/
receiving apparatus and so forth.

20 As well known, recently, due to the advancement of
the digital signal compression technology, a technology
of digitizing video information has advanced in the
MPEG (Moving Picture Image Coding Experts Group) or the
like to allow video information to be handled in a PC
25 (Personal Computer) environment and multimedia
environments have been improved.

At present, however, the affinity between the PC

environment and video information is very poor for the following two reasons:

1. Difference in the amounts of information to be processed ... the problem of FAT (File Allocation Table) 16 and hindrance of the PC environment by video information processing.

2. Difference in the adequate information processing schemes ... necessity to secure continuous recording and reproduction.

That is,

1. Difference in the amounts of information to be processed

At present, PCs often use FAT 16 as a file system for HDD (Hard Disk Drive) in view of compatibility with old PC data. FAT 16 permits a maximum of 2 GB (Giga bytes) per partition. When the data transfer rate of MPEG 2 is 5 Mbps (Mega bits per second), for example, only 53 minutes at a maximum can be recorded per partition. In recording two and half hours of a movie in an HDD of FAT 16, therefore, it is necessary to make recording over three partitions, making it difficult for a general-purpose PC system which does not use RAID (Redundant Arrays of Inexpensive Disk) to do automatic recording.

In the case of recording and editing video images, all of "recording/editing application software", "standard template information for edition and

processing" and "video information to be recorded or edited" should be recorded within a PC environment, thus significantly suppressing the memory space of the PC environment. After a work of recording or editing video information is completed, the remaining memory space becomes small so that execution of another application software may be hindered.

2. Difference in the adequate information processing schemes

It is essential to secure a continuous operation for recording and reproducing video information. But, the seek time of the optical head of an information recording/reproducing apparatus is very long. When video information which is located here and there on an information storage medium is sought one piece after another and sequentially reproduced by the optical head, there is a case where a reproduced image is stopped during the seek time.

When conventional PC information and video information are recorded together on the same information storage medium, video information is very likely to be recorded dispersively on the information storage medium.

When a file is changed in a PC environment, the entire file data after the change is recorded again in an empty area on a information storage medium. The re-recording position on the information storage medium

at this time is determined regardless of the recording position of file data before the change.

Because the amount of video information is vast as mentioned above, when a file is changed by the same method, re-recording takes considerable time. In the case of video information, therefore, it is desirable to re-record only a to-be-changed portion at the position before the change took place, without changing the position of an unchanged portion on the information storage medium. As this environment is not provided, however, it is very hard to handle video information in the PC environment.

The present invention has been made in view of the above situations, and it is a primary object to provide an information storage medium which has multiple layers and gives general addresses to this multiple information layers to thereby facilitate information handling, and a signal processing apparatus for that medium.

It is another object of this invention to provide a video information processing method effective in a PC environment, which prevents a PC environment from being hindered by the use of video information and can edit and process video information in a short period of time while securing a continuous operation at the time of recording or reproducing video information.

It is a further object of this invention to provide an optical system for the above video

information processing.

BRIEF SUMMARY OF THE INVENTION

To achieve the above objects, this invention records, on an information storage medium having multiple information layers including a recording layer capable of making recording with condensed light, general addresses for the multiple information layers and information indicating a condition for setting the general addresses.

Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

FIG. 1 is a perspective view of one embodiment of a multi-purpose information processing apparatus according to this invention, showing an opening/closing

mechanism portion (lid) open;

FIG. 2 is a perspective view depicting the opening/closing mechanism portion (lid) of this multi-purpose information processing apparatus closed;

5 FIG. 3 is a perspective view illustrating one use mode of this multi-purpose information processing;

FIG. 4 is a perspective view illustrating another use mode of this multi-purpose information processing apparatus;

10 FIG. 5 is a perspective view showing a different use mode of this multi-purpose information processing apparatus;

15 FIGS. 6A and 6B are perspective views showing a still further use mode of this multi-purpose information processing apparatus;

FIG. 7 is a perspective view depicting a modification of this multi-purpose information processing apparatus;

20 FIG. 8 is a perspective view depicting another modification of this multi-purpose information processing apparatus;

25 FIG. 9 is a perspective view for explaining a display mode of operational keys of this multi-purpose information processing apparatus and how to operate them;

FIGS. 10A and 10B are perspective views showing a modification of a TV camera section and a microphone

section of this multi-purpose information processing apparatus;

FIG. 11 is a block structural diagram illustrating the schematic structure of internal electrical blocks of the multi-purpose information processing apparatus;

FIGS. 12A and 12B are perspective views respectively showing further modifications of the TV camera section and the microphone section of this multi-purpose information processing apparatus;

FIGS. 13A through 13C are perspective views illustrating another embodiment of a multi-purpose information processing apparatus according to this invention;

FIGS. 14A through 14C are perspective views illustrating a further embodiment of a multi-purpose information processing apparatus according to this invention;

FIGS. 15A through 15C are perspective views illustrating a still further embodiment of a multi-purpose information processing apparatus according to this invention;

FIGS. 16A through 16C are perspective views illustrating a yet still further embodiment of a multi-purpose information processing apparatus according to this invention;

FIGS. 17A and 17B are side cross-sectional views each illustrating one embodiment of an information

storage medium having multiple information layers according to this invention;

FIG. 18 is a diagram for explaining a general data format when this information storage medium is a DVD-RAM disk;

FIG. 19 is a diagram for explaining the detailed data formats of a lead-in area and lead-out area of this DVD-RAM disk;

FIG. 20 is a diagram for explaining the relationship between the zones and groups of a data area of this DVD-RAM disk;

FIG. 21 is a diagram for explaining the detailed data formats of the data area of this DVD-RAM disk;

FIG. 22 is a flowchart for explaining procedures of setting a logical number of this DVD-RAM disk;

FIG. 23 is a flowchart for explaining procedures of correcting a defect on this DVD-RAM disk;

FIG. 24 is a diagram showing volume space when this information storage medium is a DVD-ROM disk;

FIG. 25 is a diagram for explaining the data format of a lead-in area of this DVD-ROM disk;

FIG. 26 is a diagram for explaining the contents of information for describing the physical format of this DVD-ROM disk;

FIG. 27 is a diagram for explaining the directory structure of information recorded on this information storage medium;

FIG. 28 is a diagram for explaining another directory structure of information recorded on this information storage medium;

FIGS. 29, 30 and 31 are diagrams showing one example in which a file system is recorded on this information storage medium according to the UDF;

FIG. 32 is a diagram for explaining one example of volume space of this information storage medium;

FIG. 33 is a diagram for explaining another example of volume space of this information storage medium;

FIGS. 34A and 34B are diagrams for explaining a further example of volume space of this information storage medium;

FIG. 35 is a diagram exemplifying a typical file system structure;

FIGS. 36A and 36B are diagrams for explaining information contents of the information storage medium shown in FIG. 33 before and after initialization in comparison with each other;

FIGS. 37A and 37B are diagrams for explaining information contents of the information storage medium shown in FIG. 33 before and after initialization in comparison with each other;

FIGS. 38A and 38B are diagrams for explaining information contents of the information storage medium shown in FIGS. 34A and 34B before and after

initialization in comparison with each other;

FIGS. 39A and 39B are diagrams for explaining information contents of the information storage medium shown in FIGS. 34A and 34B before and after

5 initialization in comparison with each other;

FIG. 40 is a perspective view showing the outward appearance of a multiple information storage medium; and

10 FIG. 41 is a diagram for explaining volume space when this invention is adapted to the information storage medium shown in FIG. 40.

DETAILED DESCRIPTION OF THE INVENTION

To begin with, the concepts of the basic objects of this invention will be described hierarchically.

15 [1] To prevent a PC environment from being hindered by video information processing,

[1-1] All of "recording/editing application software", "standard template information for edition and processing" and "video information to be recorded or edited" are recorded on a removable information storage medium and the environment returns to the one before processing video information when this information storage medium is unloaded.

20 [1-2] "Recording/editing application software" and "standard template information for edition and processing" are designed into an emboss structure which is easily duplicatable, thereby reducing the cost of

the medium.

[2] To secure a large capacity,

[2-1] Multiple information storage media, such
as a disk pack, are provided with a method of setting
5 serial logical sector numbers so that all can be
handled as one volume.

[2-2] Even in a structure wherein a recording
layer and information reproducing layer are placed on
a single information storage medium, those two layers
10 can be handled as one volume.

[3] To shorten the time for a process of
partially modifying video information and facilitate
edition in a PC environment,

[3-1] Video information is collected into one
15 file (AV File) and a video information object and its
management information are recorded in the same file.

[3-2] A recordable and reproducible video
information directory (Videoram) is set, all the AV
files (File) are arranged under that directory and
20 an edition directory (Avi) in a PC is set in parallel.

[3-3] At the time of changing a file of video
information, only a portion to be changed on the
information storage medium is changed. That is, change
and additional writing are carried out cell by cell
25 with respect to a video object in one file.

[4] To ensure portability of a PC capable of
processing video information,

[4-1] A structure which has only an IC (Integrated Circuit) memory including a removable memory card and an optical information recording/reproducing apparatus, i.e., a structure which does not have a HDD is provided, and the ROM section of a double layer disk having a RAM (Random Access Memory)/ROM (Read Only Memory) is provided with application software and a template, thereby securing memory space of a portable PC.

[4-2] The structure has a lid attached to the outside of a notebook type PC in a storage mode (in a folded state) for loading and unloading an information storage medium. This can allow the information storage medium to be unloaded when the notebook type PC is stored and can design the notebook type PC flatter.

Next, the basic conditions of this invention will be systematically and schematically discussed. First, the important features of this invention are grouped into two.

(A) Address setting method suitable for video information

(B) Structure of a portable PC

The address setting method suitable for video information in (A) is classified into:

(a1) a logical sector number setting scheme which generalizes a multi-layer disk including a recording layer, and

(a2) a scheme of setting logical sector numbers in order from an outward zone of the disk.

The above items will be further classified as follows.

5 The logical sector number setting scheme which generalizes a multi-layer disk including a recording layer in (a1) includes:

10 (a11) a technique of providing each disk with information indicating the order of giving logical sector numbers, and

 (a12) a technique for a general logical sector number setting scheme for a double-layer disk of a recording layer/information reproducing layer.

15 The technique of providing each disk with information indicating the order of giving logical sector numbers in (a11) further includes:

 (a111) a general logical sector number setting scheme for a multiple information storage medium, which includes:

20 (a1111) a technique of providing information for giving a general logical sector number, i.e., a technique of providing the number of disks in a disk pack, disk numbers and so forth.

25 The technique for a general logical sector number setting scheme for a double-layer disk of a recording layer/information reproducing layer in (a12) includes:

 (a121) a technique of discriminating a file in

the RAM section and a file in the ROM section based on permissions of a file entry,

(a122) a technique of providing management information for unrecorded areas, considering the entire information reproducing layer as a recorded state and removing addresses corresponding to the information reproducing layer from the unrecorded area management information,

(a123) a technique of using template information of the information reproducing layer, and

(a124) a technique of performing automatic information copying from the information reproducing layer.

The technique of using template information of the information reproducing layer in (a123) includes:

(a1231) a technique of making a template as video window allocation information (album-like), and

(a1232) a technique of making a template as a sub video containing a peripheral frame pattern (idol picture).

The technique of performing automatic information copying from the information reproducing layer in (a124) includes:

(a1241) a technique of recording essential information for performing automatic information copying,

(a1242) a technique of automatically copying

a recording and reproducing directory (Videoram) and a directory (Avi) for saving a conversion file for PC edition, and

(a1243) a technique of automatically inserting CM (Commercial) information in a recorded video image in a sub video format.

The technique of recording essential information for performing automatic information copying in (a1241) includes:

(a12411) a technique in which a copy range is recorded at a reserve position of the lead-in area of the ROM section, and

(a12412) a technique of providing a reserve position of the lead-in area of the RAM section with information indicating whether or not copying for a double-layer disk has been completed.

The technique in which a copy range is recorded at a reserve position of the lead-in area of the ROM section in (a12411) includes:

(a124111) copying the contents of the root directory, videoram directory and an audio video directory (Avi Directory) in the RAM section, and

(a124112) allowing a user to designate the AV file size when the information storage medium which has been copied into the RAM section for the first time is used.

The technique of automatically inserting CM (Commercial) information in a recorded video image in

a sub video format in (a1243) includes:

(a12431) a technique of recording the number of displays for each insertion of CM in a CM management area and stopping displaying CM when it is displayed a specific number of times (effect).

As a technique for the structure of a portable PC in (B), there is

(b1) a technique of designing a structure which allows a disk to be loaded in the outside of a notebook type PC (mainly for a reproduction purpose only), and this technique includes:

(b11) a technique of fitting an optical disk drive on the display side, and

(b12) a technique of fitting an optical disk drive on the keyboard side.

One embodiment of a system and an apparatus according to this invention will now be explained with reference to the drawings.

FIG. 1 illustrates the schematic structure of a multi-purpose information processing apparatus which will be discussed in this embodiment.

This multi-purpose information processing apparatus is of such a size as to be put in one hand, and incorporates a semiconductor MPU (Micro Processing Unit) as an information processing section in near the center portion in the casing though not illustrated. As shown in FIG. 1, with an opening/closing mechanism

portion (lid) M12 open, an information storage medium (optical disk) can be loaded or unloaded. An information recording/reproducing section is located under the loaded information storage medium. After the loading
5 of the information storage medium, the opening/closing mechanism portion M12 is closed (see FIG. 2), and then processing according to the type of the information storage medium is performed.

This multi-purpose information processing
10 apparatus is provided with a speaker and an earphone jack terminal, so that when an audio CD (Compact Disk) is inserted as an information storage medium, one can listen to music as in the case of a CD Walkman. Further, when the information storage medium of this
15 invention is inserted, multi-purpose functions can be accomplished by a program which is recorded there.

A significant feature of this invention lies in that by switching an information storage medium where a program is recorded, as in the case of listening to
20 different kinds of musics by switching a CD at home, different types of information processing become possible and, like a CD Walkman, it has such an advantage as being small and excellent in portability.

When a program, such as MS-Word or Excel, is
25 recorded in an information storage medium, for example, it can be opened from the middle as shown in FIG. 3 and can be used as a notebook PC. That is, as shown in

FIG. 3, arranged inside are an information display section M21, such as a liquid crystal display or plasma display, and an information input section M20, such as a keyboard, flat panel and a touch panel.

5 The mode shown in FIG. 3 matches with the use conditions of an ordinary notebook PC. Further, as shown in FIG. 4, the positional relationship between the information input section M20 and the information display section M21 may be reversed, not only they can
10 be opened 180° as shown in FIG. 5, but also after being opened as shown in FIG. 6A, the information display section M21 and the information input section M20 can be placed one on the other in such a way as to face outward as shown in FIG. 6B.

15 Windows 98 comes equipped with DVD video reproducing software on the OS (Operating System) side, so that when a DVD video disk is used as an information storage medium, one can enjoy video images while carrying the apparatus around in the form shown in
20 FIG. 6B. Further, as will be discussed in detail later, as an information storage medium in which the program of an information management layer that has been created as part of the OS is loaded, one can easily play back or edit recorded video images together
25 with many friends.

 Because this multi-purpose information processing apparatus incorporates a tuner, when an information

storage medium having a program for displaying a TV
(Television) screen is loaded, one can also see TV
video images in the form of FIG. 6B while being on a
train. Since this multi-purpose information processing
5 apparatus incorporates a modem, if communications
software is recorded in the information storage medium,
it is also possible to record necessary information in
the recording layer of the information storage medium
using a WWW (World Wide Web) line in the night and
10 display the loaded information on the information
display section M21 in the form as shown in FIG. 6B on
a train to one's office or school.

Conventional notebook PCs typically have a
structure in which an information storage medium is
15 placed on a tray which is loaded in and out from the
side, and is loaded. The use of a tray, however,
requires a mechanism of loading an information storage
medium to the information recording/reproducing
section, which is a factor to increase the thickness of
20 the whole information processing apparatus. By way of
contrast, the multi-purpose information processing
apparatus according to this invention has the first
point in that a tray from the side is removed, a
mechanism for directly loading the information storage
25 medium into the information recording/reproducing
section is taken and eliminating the loading mechanism
is eliminated, thus achieving a lower cost and a

flatter structure, and the opening/closing mechanism
portion M12 is arranged at the back of the information
input section M20 to thereby guarantee the strength
of the entire multi-purpose information processing
5 apparatus.

The multi-purpose information processing apparatus
according to this invention has the second point in
that it does not have a built-in magnetic recording
apparatus, such as HDD, a soft OS is stored in a
10 non-volatile semiconductor memory, such as EEPROM
(Electrically Erasable and Programmable Read Only
Memory) and a higher-rank OS and application software
are provided on the information storage medium, thus
making the apparatus more compact, lighter and lower in
15 cost.

The multi-purpose information processing apparatus
according to this invention is not limited to the
structure shown in FIG. 1, but may take a structure as
shown in, for example, FIG. 7, in which the opening/
20 closing mechanism portion M12 is arranged at the back
of the information display section M21, i.e., the
information recording/reproducing section is located on
a body M200 having the information display section M21.

A program may be recorded for usage on a
25 recordable information storage medium, such as an MO
(Magneto Optics) disk or PD disk, as an information
storage medium that is used in the multi-purpose

information processing apparatus according to this invention. In this case, however, the program should be recorded on each of MO disks and PD disks, and recording involves a cost.

5 A CD-ROM or DVD-ROM disk is characterized in that information is recorded by a protruding and recessed structure on the surface and this protruding and recessed structure is formed in a very short period of time by a method, such as injection, at the time
10 of forming a disk substrate, so that an information storage medium can be produced at a low cost.

 From the above characteristic, the feature of this invention lies in the structure of the information storage medium which has a multi-layer disk structure
15 that has two information layers, the first layer being an information reproducing layer where information such as a program is recorded in the protruding and recessed structure as in a CD-ROM or DVD-ROM disk, with a
20 recording layer capable of recording information using condensed light, such as that of a CD-R (Recordable), CD-R/W (Rewritable), DVD-R and DVD-RAM disks, being located on the second layer.

 A description will now be given of the details of the above-described multi-purpose information
25 processing apparatus.

 In FIG. 1, this multi-purpose information processing apparatus has a first body M100 of a thin

box shape, and a second body M200 of a thin box shape which is attachable and detachable and openable and closable to the first surface side (inner surface side) of the first body M100 and can be stacked on and open
5 to the first body M100. Provided on the outer surface of the first body M100 are a dent section M13 and the opening/closing mechanism portion M12 which can open and close this dent section M13. A recording medium loading section which can allow, for example, an
10 information storage medium (disk) to be loaded or unloaded is constructed in the dent section M13.

The point of rotational support of the opening/closing mechanism portion M12 corresponds to one side of the dent section M13 and lock mechanisms M18 and M19
15 are provided at its free rotational end and the edge of the dent section M13 which corresponds that end to lock the opening/closing mechanism portion M12 when it is closed. A chassis M11 is arranged horizontal at the bottom of the dent section M13 and a turn table M15 on
20 which a disk is to be placed is exposed at the cutaway portion in the center of the chassis. Further, a spindle which coaxially engages with the center hole of the disk protrudes from the center of the turn table M15. The opening/closing mechanism portion M12 is also
25 provided with a clamper M17 for pressing the disk when the it is closed.

Further, a thin and long cutaway portion is formed

in the chassis M11 and a head mechanism M16 is constructed in such a way as to be reciprocable along this cutaway portion. The direction of this reciprocation is diagonal to the rectangular dent section M13.

5 FIG. 2 shows the outward appearance of the opening/closing mechanism portion M12 when closed. A part of the opening/closing mechanism portion M12 is formed of a transparent member, so that it is possible to confirm whether or not a disk is loaded inside.

10 FIG. 3 shows the first body M100 lifted up from the second body M200 and open. The first and second bodies M100 and M200 have their one side portions coupled together by a coupling mechanism M22 so that they can turn with respect to each other.

15 With this structure, the information input section M20 for operating the apparatus is provided as, for example, a keyboard, on the inner surface of the first body M100, so that a key operation can be performed. The information display section M21 which uses a liquid
20 crystal panel is provided on the inner surface side of the second body M200, so that the aforementioned disk can be played back to see its video images.

 The information input section M20 is not limited to a mechanical keyboard, but may be constructed as
25 a display section. That is, it may be constructed in such a way as to display images of multiple keys so that a user click and designate an arbitrary key with

a cursor or touch and designate an arbitrary key with an operation pen M23. In the case of using the operation pen M23, touch electrodes of transparent electrodes are provided on the front surface of the information input section M20. Alternatively, a system in which the operation pen M23 itself recognizes an image and reads a designated key is employed.

Although the information input section M20 is provided on the inner surface of the first body M100 and the information display section M21 is provided on the second body M200, they may be reversed. That is, the information display section M21 may be provided on the inner surface of the first body M100 and the information input section M20 may be provided on the second body M200.

FIG. 4 illustrates another use mode. Although an operation is performed as seen from the second body M200 side in the mode in FIG. 3, the apparatus can be used in the reverse mode. That is, as shown in FIG. 4, the apparatus may be used with the first body M100 arranged flat and the second body M200 set upright. In this case, the direction of the operational keys and the up and down display direction of the screen are reversed to those of the embodiment in FIG. 3.

FIG. 5 shows a different use mode. Although the first and second bodies M100 and M200 are used with some angle therebetween in the previous use mode, the

mode is not limited to this mode, but they may be used in a flat and open form as shown in FIG. 5. Such a mode is feasible by modifying the coupling mechanism M22. For example, a plurality of lock positions may be provided within the range of a rotational angle or the first and second bodies M100 and M200 may be so set as to be sufficiently turn at a wide rotational angle about the point of rotational support and a load is increased at the point of rotational support so that the posture can be maintained at an arbitrary position.

Therefore, the use mode may be in such a state that the first and second bodies M100 and M200 are open at more than 180° as shown in FIG. 6A or in such a state that their outer surface sides are put together as shown in FIG. 6B. Alternatively, as shown in FIG. 7, a structure where the opening/closing mechanism portion M12 is located on the body M200 having the information display section M21.

FIG. 8 depicts another modification of the above embodiment. That is, a signal processing apparatus in this multi-purpose information processing apparatus has a function of freely changing the display direction of the screen to an arbitrary direction. Therefore, the apparatus can be used in a vertical form as shown in FIG. 8. Further, in the case of this apparatus, the information input section M20 of the body M100 is an operational section of a display type. When the

apparatus is used as, for example, a reproducing apparatus, therefore, it is possible to display operational keys needed for a reproducing apparatus, whereas when the apparatus is used as a TV, it is possible to display operational keys needed for a TV. When the apparatus is used as a recording apparatus, it is possible to display operational keys needed for a recording apparatus.

For data of the operational keys, operational keys information recorded on, for example, a disk may be used or the data may be recorded beforehand as video data in a memory provided inside.

Further, this apparatus is provided with a TV camera section M30 using a CCD (Charge Coupled Device) or the like, a microphone section M31 and speaker sections M33 and M34. This apparatus incorporates a radio tuner and a TV tuner.

FIG. 9 shows an example wherein operational keys in the case of performing reproduction and recording of a disk are displayed. The reproduction and recording modes are set by selecting a mode select switch, which is previously provided, though not illustrated.

The keys that are necessary for reproduction and recording are displayed on the information input section M20. And, a cursor M41 for selecting a key appears. Many keys are aligned in the horizontal (row) direction and the vertical (column) direction.

An operational button M40 for selecting a key protrudes from a portion of the body M100 and the position of the cursor M41 can be moved by operating this operational button M40. Applying upward or downward force to the operational button M40 can shift the row where the cursor M41 is positioned upward or downward. When the cursor M41 is positioned in a row, it moves in the column direction at a given speed and circulates while specifying the keys on the same row one after another.

FIG. 9 exemplifies the state in which it circulates while specifying the individual keys of the first row. When the operational button M40 is pressed toward the body M100 as the cursor M41 comes to the position of an ON key, the apparatus determines that this key has been selected, and turns on the disk recording/reproducing system to set it in a standby mode. When the operational button M40 is pressed toward the body M100 as the cursor M41 comes to the position of a PLAY key, the apparatus determines that this key has been selected, so that a disk playback mode is set.

To stop playback, the cursor M40 has only to be moved to the first row and the operational button M40 has to be pressed toward the body M100 as the cursor M40 comes to the position of an OFF key.

A description will now be given of the case of executing recording. When the cursor M41 comes to the

position of the ON key, the operational button M40 is pressed toward the body M100 to set a standby mode.

Next, downward force is applied to the operational button M40 to shift the cursor M41 to the second row.

5 Then, when the cursor M41 comes to the position of a REC key while going around the keys of the second row, the operational button M40 is pressed toward the body M100. Then, TV and CM keys start blinking. This is an inquiry of whether a TV broadcast program is to be
10 recorded or camera recording is carried out. When the TV key is selected here, numeral keys 0 to 9 blink this time, requesting for channel selection. The user adjusts the position of the cursor M41 to select the desired channel. Then, selecting a start key M42
15 finally starts recording. When a timer setting key M43 is operated without operating the start key M42, a keyboard (not shown) for setting a timer is displayed.

According to the above-described operation method, a key operation can be done with one hand. Of course,
20 the operation is not limited to this operation system but a mouse may be connected to perform an operation.

FIGS. 10A and 10B show an example wherein the directions of the TV camera section M30 and the microphone section M31 mentioned earlier are changed.
25 That is, the TV camera section M30 and the microphone section M31 can change their directions in accordance with the use mode.

If it is possible to change images (switching of images between the first and second bodies M100 and M200) or to freely change the display direction of images in the above-described operation method, the direction of the operation can be set variously. While the above-described example is a display mode suitable for the operation of the operational button M40 with the right hand, it is possible to set a display mode suitable for an operation with the left hand. That is, the operational keys are displayed on the left-hand side and a video image is displayed on the right-hand side.

With the above-described system, the apparatus can be used as a character input device or a so-called word processor. It is also possible to use the apparatus in such a way as to display a main video image on one display section and display a sub video image on the other display section.

FIG. 11 shows the schematic structure that controls the above apparatus. A signal processing and control section M50 can read information from a disk M10 loaded into a disk loading section and process it and can record information on the disk M10. The signal processing and control section M50 can also process a signal from an operation section M51 (including the aforementioned operational button M40) to perform a process of selecting and determining an operational

key. A keyboard panel image memory M52 holds a
keyboard panel image read from the disk M10 or
a keyboard image previously provided. The signal
processing and control section M50 can read keyboard
5 panel image information from the memory M52 and display
it on the information input section M20.

A screen setting section M53 can change the
direction of the screen or can execute switching
between an image to be displayed on the information
10 display section M21 and an image to be displayed on
the information input section M20.

FIG. 12A shows an example in which a notebook PC
type multi-purpose information processing apparatus,
which has a main body M61 having a keyboard M60 and
15 a lid body M63 having a display section M62 supported
rotatable to this main body M61, is attached with a TV
camera section M64 in such a way that its direction can
be changed. In this case, the TV camera section M64 is
provided at the center portion of the freely rotatable
20 end of the lid body M63 and is rotated 180° to the user
side and to the opposite side to the user with the lid
body M63 in between as indicated by the arrows in the
diagram.

Further, as shown in FIG. 12B, a TV camera section
25 M66 may be provided at one end of a rotary shaft M65,
which rotatably couples a main body M60 of a notebook
PC multi-purpose information processing apparatus and

the lid body M63, in such a way that it can rotate coaxial to the rotary shaft M65.

FIG. 13A shows a multi-purpose information processing apparatus so designed as to further have
5 a third body M300 of a thin box shape stacked with respect to the stacked first and second bodies M100 and M200. In this case, when the body M300 is so opened as to be flat with the body M200 as shown in FIG. 13B and then the bodies M200 and M300 are set upright to the
10 body M100 as shown in FIG. 13C, the information display section M21 which continuously stretches over the two bodies M200 and M300 is constructed.

FIG. 14A shows a multi-purpose information processing apparatus so designed as to have the third
15 body M300 of a thin box shape inserted between the first and second bodies M100 and M200. In this case, the body M100 and the body M200 are connected together by a flexible board M70 so as to extend over the thickness of the body M300. And, a display function is
20 provided inside this flexible board M70 or on the side that faces the end portion of the body M300.

When the body M100 is so opened as to be flat with the body M200 as shown in FIG. 14B and then the body M300 is so opened as to be flat with the body M200 as
25 shown in FIG. 14C, the information display section M21 which continuously stretches over the two bodies M100 and M200 via the flexible board M70 is constructed.

In this case, the information input section M20 is provided on the body M300.

FIG. 15A shows a multi-purpose information processing apparatus so designed as to further have
5 third and fourth bodies M300 and M400 of thin box shapes stacked with respect to the stacked first and second bodies M100 and M200. In this case, when the bodies M100 and M400 are so opened as to be respectively flat with the bodies M200 and M300 as
10 shown in FIG. 15B and then the bodies M100 and M200 are respectively set upright with respect to the bodies M300 and M400 as shown in FIG. 15C, the information input section M20 which continuously stretches over the two bodies M300 and M400 is constructed.

15 FIG. 16A shows a multi-purpose information processing apparatus so designed as to further have the third and fourth bodies M300 and M400 of thin box shapes stacked with respect to the stacked first and second bodies M100 and M200. In this case, when
20 the bodies M100 and M400 are so opened as to be respectively flat with the bodies M200 and M300 as shown in FIG. 16B and then the bodies M300 and M400 are respectively set upright with respect to the bodies M100 and M200 as shown in FIG. 16C, the information
25 input section M20 which continuously stretches over the two bodies M100 and M200 is constructed and the information display section M21 which continuously

stretches over the two bodies M300 and M400 is constructed.

In this case too, it is possible to provide such a structure that the opening/closing mechanism portion
5 M12 is located at the back of the information display section M21, i.e., that the information recording/reproducing section is located on the bodies M300 and M400 which have the information display section M21.

FIG. 17A shows the structure of the information
10 storage medium according to this invention. This information storage medium has an information reproducing layer 7 and a recording layer 6 as information layers respectively formed on one sides of transparent substrates 9 and 10 with approximately the
15 same thickness so as to be arranged inside and adhered together by a transparent adhesive layer 8.

The surface of one side of the transparent substrate 9 has a minute protruding and recessed structure and the information reproducing layer 7 is
20 formed, half coated, on that surface. An objective lens which condenses a laser beam shifts its position as indicated by 11a and 11b, so that the converging points respectively correspond to the information reproducing layer 7 and the recording layer 6.

25 The transmittance and reflectance of the information reproducing layer 7 are so designed as to be approximately equal to each other, so that the laser beam

that has passed the information reproducing layer 7 converges on the recording layer 6.

FIG. 17B shows another example the structure of the information storage medium according to this invention. The information reproducing layer 7 and the recording layer 6 are close to each other whereas they are well apart from each other in the previous information storage medium. In this example, the thicknesses of the transparent substrates 9 and 10 are approximately the same.

Although recordable recording layers of, for example, a CD-R, CD-R/W, DVD-R, DVD-RAM and the like as the above information recording layer are included in the scope of this invention, the following will discuss the case where the recording layer of a DVD-RAM disk is used as the recording layer and the reproducing layer of a DVD-ROM disk is used as the information reproducing layer. But, the subject matter of this invention is not limited to that, but is of course adaptable to the recording format of CD-R and the recording format of CD-ROM.

To begin with, the data structure of a DVD-RAM disk will be discussed.

FIGS. 18 through 23 are diagrams for explaining the data structure of a DVD-RAM disk. FIG. 18 is a diagram for explaining the layout of a RAM layer of a double-layer optical disk. Specifically, a lead-in

area on the inner peripheral side of the disk comprises an emboss zone having a light reflecting surface with a protruding and recessed shape, a mirror zone whose surface is flat (mirror surface) and a rewritable zone.

5 The emboss zone includes a reference signal zone and a control data zone, and the mirror zone includes a connection zone.

10 The rewritable zone includes a disk test zone, a drive test zone, a disk ID (identifier) zone and defect management areas DMA1 and DMA2.

15 A lead-out area on the outer peripheral side of the disk comprises a rewritable zone which includes defect management areas DMA3 and DMA4 , a disk ID (identifier) zone, a drive test zone and a disk test zone.

20 A data area between the lead-in area and the lead-out area is segmented into 24 annual-ring like zones 00 to 23. Each zone has a constant rotational speed but the rotational speed differs between different zones.

25 The number of sectors constituting each zone differs zone by zone. Specifically, the zones on the inner peripheral side of the disk (zone 00 or the like) have higher rotational speeds and fewer constituting sectors. By way of contrast, the zones on the outer peripheral side of the disk (zone 23 or the like) have lower rotational speeds and greater constituting sectors. This layout achieves fast accessibility such

as CAV (Constant Angular Velocity) in each zone and achieves high density recording such as CLV (Constant Linear Velocity) over the entire zones.

FIG. 19 is a diagram for explaining the details of the lead-in area and lead-out area in the disk layout.

Recorded in the control data zone in the emboss data zone are the type of the DVD standards to be adapted (DVD-ROM, DVD-RAM, DVD-R or the like) and a part version, a disk size and a minimum read rate, a disk structure (1-layer ROM disk, 1-layer RAM disk, double-layer ROM/RAM disk or the like), a recording density, a data area allocation, a descriptor of a burst cutting area, a linear velocity condition for designating the amount of exposure at the recording time, reading power, peak power, bias power and information about the production of the medium.

In other words, information about the whole information storage medium, such as physical sector numbers indicating the recording start and recording end positions, information of the recording power, recording pulse width, erasing power, reproducing power, linear velocities at the recording and erasing times and so forth, information on the recording, reproducing and erasing characteristics, and information about the production of the information storage medium, such as the production number of each disk have been recorded beforehand in this control data zone.

The rewritable data zones of the lead-in and lead-out areas are each provided with a specific disk name recording area for each medium, a test recording area (for checking the recording and erasing conditions) and a management information recording area associated with a defect area in the data area. By using those areas, optimal recording can be performed on each disk.

The individual zones 00 to 23 of the data area are physically arranged on the disk, and have a guard area for distinguishing a data use area between zones in addition to the data area (user areas + spare areas) which is actually used. By way of contrast, groups are assigned to the data area which is actually used.

FIG. 20 shows the relationship between the groups and zones. A group 00 separated by a guard area 711 includes a user area UA00 which starts at the physical sector number 031000h of the disk and a spare area SA00, and a group 01 separated by the guard area 711 and a guard area 712 includes a user area UA01 and a spare area SA01. Likewise, a group 23 separated by a guard area 713 on the outermost peripheral side of the disk includes a user area UA23 and a spare area ending at the last physical sector number of the disk.

When an optical disk (DVD-RAM disk) having this structure is set to an unillustrated disk drive, it is possible to perform a process of changing the

rotational speed of the disk while passing the guard area. At the time an unillustrated optical head seeks from the group 00 to the group 01, for example, the rotational speed of the disk 10 is changed to N01 from N00 while passing the guard area 711.

FIG. 21 is a diagram for explaining the details of the data area in the disk layout. To 24 zones, the same number of groups are assigned and each group includes a pair of a user area to be used for data recording and a spare area to be used in a replacement process. The user area and spare area of each group lie in the zone of the same rotational speed, and those with smaller group numbers belong to a fast rotation zone while those with larger group numbers belong to a slow rotation zone. While the groups in the slow rotation zone have greater number of sectors than the groups in the fast rotation zone, the slow rotation zone has a larger rotational radius of the disk, so that the physical recording density on the disk becomes nearly uniform over the entire zones (entire groups).

In each group, the user area is located on the side where the sector number is smaller (i.e., on the inner peripheral side on the disk) and the spare area is located on the side where the sector number is larger (i.e., on the outer peripheral side on the disk). This allocation of sector numbers corresponds to a way of arranging the user area UA and spare area

SA on the disk in FIG. 20.

FIG. 22 shows procedures of setting a logical
block number in the information recording/reproducing
apparatus. In this routine, it is important to
5 identify a DVD-RAM. It is also important to detect
whether or not there is a defect and to correct
a conversion table if there is a defect.

Some methods of processing a defect produced in
a user area will now be explained. Before that, the
10 defect management areas DMA1 to DMA4 necessary for the
defect processing and the associated matter will be
discussed.

[Defect Management Area]

The defect management areas DMA1 to DMA4 include
15 information of the structure of the data area and
defect management and consist of, for example, 32
sectors. The two defect management areas DMA1 and DMA2
are located in the lead-in area of the optical disk
(DVD-RAM disk) and the other two defect management
20 areas DMA3 and DMA4 are located in the lead-out area of
the optical disk. Reserve sectors (spare sectors) are
added following the individual defect management areas
DMA1-DMA4 as needed.

Each of the defect management areas DMA1-DMA4
25 consists of two ECC (Error Checking and Correcting)
blocks. The first ECC block of each of the defect
management areas DMA1-DMA4 includes a disk definition

information structure DDS (Disk Definition Structure)
and a primary defect list PDL (Primary Defect List).

The second ECC block of each of the defect
management areas DMA1-DMA4 includes a secondary defect
5 list SDL (Secondary Defect List). The four primary
defect lists PDLs of the four defect management areas
DMA1-DMA4 have the same contents, and the four
secondary defect lists SDLs have the same contents.

While the four disk definition information
10 structures DDSs of the four defect management areas
DMA1-DMA4 basically have the same contents, pointers to
the PDLs and SDLs of the four defect management areas
have different contents.

Here, a DDS/PDL block means an ECC block which
15 includes DDS and PDL. An SDL block means an ECC block
which includes SDL.

The following are the contents of the individual
defect management areas DMA1-DMA4 after the optical
disk (DVD-RAM disk) is initialized.

20 (1) The first sector of each DDS/PDL block
includes DDS.

(2) The second sector of each DDS/PDL block
includes PDL.

(3) The first sector of each SDL block includes
25 SDL.

The block lengths of the primary defect list PDL
and the secondary defect list SDL are determined by

their numbers of entries. Unused sectors in the individual defect management areas DMA1-DMA4 are written with data FFh. All spare sectors are written with 00h.

5 [Disk Definition Information]

The disk definition information structure DDS consists of a table having a length of one sector. This DDS has contents that define a disk initializing method and the start addresses of PDL and SDL. The DDS is recorded in the first sector of each of the defect management areas DMA1-DMA4 when disk initialization is completed.

[Partitioning]

During disk initialization, the data area is separated into 24 consecutive groups 00 to 23. A plurality of buffer blocks are arranged at the head of each separated zone, excluding the first zone 00 and the last zone 23. Each group completely covers a single zone, excluding the buffer blocks.

Each group has a full block of a data sector (user area) and a following full block of a spare sector (spare area).

[Spare Sector]

A defect sector in each data area is replaced (changed) to a normal sector by a predetermined defect management method (verification, slipping replacement, skipping replacement, linear replacement). A spare

sector block for this replacement is included in the spare area of each group.

Note that an optical disk can be initialized before use, this initialization can be executed
5 regardless of verification.

A defect sector is processed by a slipping replacement process (Slipping Replacement Algorithm), skipping replacement process (Skipping Replacement Algorithm) or linear replacement process (Linear
10 Replacement Algorithm). The total number of entries that are listed in the PDL and SDL by those processes (Algorithms) is set to equal to or less than a predetermined number, for example, 4092.
[Initialization]

15 In the initialization of a disk, the four defect management areas DMA1-DMA4 are recorded before the first use of that disk. The data area is partitioned into 24 groups 00 to 23. Each group includes multiple blocks for the data sectors (user areas) and subsequent
20 multiple spare blocks (spare areas). Those spare blocks can be used for replacement of defect sectors.

At the time of initialization, each group can be verified (certified). This specifies a defect sector found in the initialization stage, so that it is
25 automatically skipped at the time of usage.

Parameters of all the disk definition information structures DDSs are recorded in the four DDS sectors.

The primary defect lists PDL and the secondary defect lists SDL are recorded in the four defect management areas DMA1-DMA4. In the first initialization, the update counter in SDL is set to 00h and all reserve
5 blocks are written with 00h.

[Verification/Certification]

In verifying a disk, the data sectors (user areas) and spare sectors (spare areas) in each group are verified. This verification can be accomplished by
10 carrying out read and write checking of the sectors in each group.

A defect sector which is found during verification is processed by, for example, slipping replacement. This defect sector should not used for reading and
15 writing.

When the spare sectors in the zones of the disk are used up during verification, that disk is determined as no good and should not be used thereafter.

When a disk is used for data storage for a
20 computer, the aforementioned initialization + verification is performed, but when a disk is used for video recording, video recording may take place without executing the aforementioned initialization + verification.

25 FIG. 23 shows the procedures of a defect processing operation in the information recording/reproducing apparatus.

DVD-ROM will be described next. FIG. 24 shows the overall volume space of DVD-ROM. The lead-in area, the data area and the lead-out area are arranged from the inner periphery toward the outer periphery, and likewise physical sector numbers are affixed.

FIG. 25 shows the structure of data information to be described in the lead-in area. The physical sector number is predefined in accordance with the contents of each data.

As the number of use bytes is defined in the case of describing the physical format of DVD-ROM, FIG. 26 shows its contents.

As apparent from the above-described contents, a DVD-RAM disk and DVD-ROM disk have their own physical sector numbers.

In the information storage medium of this invention, it is necessary to generalize both and handle the information. For example, information of a part of the ROM section is copied into the RAM section. This requires a general address setting method which generalizes both.

There is a method of setting logical block numbers as the general addresses of a double-layer disk in a DVD-ROM disk. For the ROM disk, however, the logical sector number information which is the general addresses is recorded in the stage of production (forming of the information reproducing layer of ROM).

By way of contrast, the RAM area of the information storage medium of this invention is in a blank state and does not have information about the general addresses. Further, Jpn. Pat. Appln. KOKAI Publication No. 161404/1998 describes a logical sector number setting method for a partial ROM disk which has a ROM section and rewritable section in the same layer. But, as the ROM section in the same layer has address setting information in this information medium structure, it is easy to affix a logical sector number and processing takes place within quite the same layer, so that this method substantially differs from the one that handles a recording layer which has no information about the general addresses. further, this publication uses FAT as a file system and needs the optimal logical sector number setting method for UDF (Universal Disk Format) that is used for DVD-RAM/ROM.

This invention therefore has a significant characteristic in that it has presented, for the first time, a method which sets general addresses (logical sector numbers) for an information storage medium having a recording layer that has no information about the general addresses and which is most suitable for UDF.

This invention has a specific feature in that, as a specific method of generally handing a DVD-RAM disk and a DVD-ROM disk, the general addresses are set by

treating an information storage medium having multiple information layers shown in FIGS. 17A and 17B as a "1-volume information storage medium having large volume space".

5 The description of the following embodiment will explain the case where as the "general address setting method for a 1-volume information storage medium", a logical sector number setting method adapted to a single DVD-RAM disk that conforms to the UDF standards
10 which are used for DVD-RAM disks is employed. But, the method is not restrictive, and as a general address setting method for a double-layer DVD-RAM/ROM disk and a disk pack containing a plurality of DVD-RAM disks in one pack, it can be set as "FAT 32 having a single
15 volume" or "NTFS (New Technology File System) having a single volume" and "UNIX space having a single volume". Further, information storage media, such as MO and PD can be subjects as media having the above-described recording layer.

20 Before going into the general address setting method of this invention (logical sector number setting method), the directory structure on the volume space in this invention will be discussed.

 As shown in FIG. 27, the directory structure for
25 information recorded on the information storage medium of this invention has a root directory 21 as the overall parent, under which an application directory 22

and an application relative directory 28 exist.

The application directory 22 contains an application execution file 23 recording program software which automatically invoked when this information storage medium is loaded into the multi-purpose information processing apparatus of this invention shown in FIG. 1, an application data file 24 where data that is created when the program software is executed is to be recorded, and an application template directory 25 which is a sub directory. Further, the application template directory 25 includes template files #1, #2, 26, 27 and so forth.

The specific contents of those files would be as follows when, for example, Excel of Microsoft Corporation is recorded on the information storage medium and Excel on the information storage medium is invoked upon booting. That is, the application directory 22 corresponds to an MSoffice folder, the application execution file 23 corresponds to Excel.exe and the template files #1, #2, 26, 27 and so forth correspond to standard templates ***.xls. The data a user created using Excel corresponds to the application data file 24.

The application relative directory 28 corresponds to a sub directory (e.g., Winword) which contains an execution file of another application (e.g., MS-Word) which can use the application data file 24 created by

the user as an object.

When a video information processing program for recording, reproducing and editing video images is recorded on the information storage medium of this invention, particularly, the directory structure in FIG. 27 becomes as shown in FIG. 28.

That is, the video information processing program for recording, reproducing and editing video images is included in a video application (Videapli.exe) 32 in a videoram directory 31. The information that has been recorded and edited here is saved as audio video file data (AVFile.dat) 33. Every recorded and edited information is recorded in this single AV video file data 33 in which video information (Video Object), audio information (Audio Object) and still picture information (Picture Object) as well as control information about them are recorded together. The standard templates to be used in editing video images are recorded in an audio video template (AVTemplt Directory) 34 as AVTemp01.dat 35 and AVTemp02.dat 36.

Commercial (CM) information is also included in AVTemp01.dat 35 and AVTemp02.dat 36. The AV video file data 33 after recording and completion of edition is converted to information of the DVD video format or DVD audio format in accordance with a conversion program in the video application 32, and is then saved under a video title set (Video_TS) 37 or an audio title set

(Audio_TS) 38.

As another embodiment of this invention, general addresses (logical sector numbers) are affixed to a multiple disk pack containing plural information storage media accommodated as a set, so that it is treated as one volume. In this case, reproduction-only DVD video disks can be packed in this multiple disk pack.

A conversion table for the general addresses (general logical sector numbers) for the physical sector numbers of this reproduction-only DVD disk and the logical block number set in this DVD video disk is described in an address convert table in an allocation map table AMT (Allocation Map Table). Information in this DVD video disk is located under the video title set 37 or the audio title set 38 in FIG. 28 in terms of the general address (logical block number).

The DVD video disk information located under the video title set 37 or the audio title set 38 can be incorporated in the AV video file data 33 using the conversion program in the video application 32.

As a video file which is easily edited by a computer, for example, there is an Avi file which is used in Video for Windows or the like. Likewise, it is possible to convert partial video information (Video Object) in the AV video file data 33 to an Avi file using the conversion program in the video application

32, save it under the sub directory of an Avi_Convrt
39, load the information storage medium which
containing this Avi file into an ordinary PC system,
edit it with an editing software (e.g., Media Studio
5 Pro) in the PC system and then returns it into the
AV video file data 33 again in the multi-purpose
information processing apparatus of this invention.

Let us return to the description of the general
address setting method for the information storage
10 medium that has the structure as shown in FIGS. 17A and
17B having the recording layer 6 and the information
reproducing layer 7.

This invention has a significant feature in that
as the general address setting method, information of
15 the recording layer 6 and the information reproducing
layer 7 are generalized and are handled as parallel
information in a single volume space.

That is, consecutive logical sector numbers LSN
(Logical Sector Number) are assigned to the recording
20 layer 6 and the information reproducing layer 7.

FIGS. 29 through 31 show one example in which
a file system is created on the information storage
medium according to the UDF. As apparent from
FIGS. 29 to 31, the root directory and sub directory
25 (Sub_Directory) information are often recorded mainly
at addresses of smaller LSN (LBN: Logical Block Number)
values. Therefore, the method of setting the LSN as

the general address in this invention is designed as follows.

As shown in FIGS. 32 and 33, the first half of the LSNs are assigned to the recording layer 6 (e.g., the DVD-RAM layer) and the second half of the LSNs are assigned to the information reproducing layer 7 (e.g., the DVD-ROM layer). By using the information storage medium format which can execute recording and reproduction by treating this one volume space as a pseudo recordable and reproducible area,

[1] information recorded on the information reproducing layer 7 is identified based on the features of recorded files. In the embodiment of this invention, the permissions in the file entry are set as write-inhibited to all users.

[2] considering that all information has already been recorded on the information reproducing layer 7, recorded flags are set at all the general address (LBN) positions corresponding to the information reproducing layer 7 as unrecorded area management information.

[3] at the time of initialization, part of information already recorded on the information reproducing layer is copied onto the recording layer to make it usable for the first time.

Through the above setting, information recorded in the recording layer 6 and information recorded in the information reproducing layer 7 are identified.

Although the DVD-RAM standards are used in the description of the embodiment of this invention, they are not restrictive but a design modification with the above-described contents may be taken with
5 the standards for MO, PD, CD-R or the like.

As shown in FIGS. 34A and 34B, various modifications are possible for the arrangement of the RAM area and the ROM area. In this case, if the disk shown in FIG. 34A has a three-layer structure having a RAM disk
10 sandwiched between two ROM disks, the LSN is increased from the inner peripheral side of the ROM disks toward the outer peripheral side and the LSN is increased from the outer peripheral side of the ROM disks toward the inner peripheral side.

According to the logical sector number setting method for a double-layer DVD-ROM disk having two recording and reproducing layers stacked, information has originally been recorded on each layer, thus eliminating the need for the measures [1] to [3]. In
15 the Jpn. Pat. Appln. KOKAI Publication No. 161404/1998, an operation of copying specific information from the ROM section to a rewritable section at the time of initializing a partial ROM disk, and then virtually setting part of the ROM section as a defect sector is
20 performed.

According to this invention which makes good use of the feature of the UDF, by way of contrast, defect

sector processing is not performed and a specific area (e.g., an area in which the volume management information of the DVD-ROM layer is described, or the like) is not designated as an access point in a file entry while keeping the areas in the entire recording layer and the entire information reproducing layer in a usable state.

A description will now be given of the format setting for DVD-RAM corresponding to the UDF. In DVD-RAM, with regard to the logical block (sector) size, a collection of logical blocks (sectors) of consecutive 2048 bytes is called "extent". One extent consists of a single logical block (sector) or a stream of consecutive logical blocks (sectors).

FIG. 35 exemplifies the file system structure, and within the parentheses is a logical block number of the position where an FID and file data are recorded on the information storage medium.

As mentioned earlier, FIGS. 29 through 31 show one example in which a file system is created on the information storage medium according to the UDF. And,

* LSN ... logical sector number 491

* LBN ... logical block number 492

* LLSN ... last logical sector number (Last LSN) 493

It is extremely rare that a space bit map is recorded together with a space table, and normally, either the space bit map or the space table is

recorded.

The gist of the UDF will be explained below.
As mentioned earlier, the UDF is the acronym of
Universal Disk Format, and mainly indicates the "rules
5 about the file management method" for a disk-shaped
information storage medium.

CD-ROM, CD-R, CD-RW, DVD video, DVD-ROM, DVD-R,
DVD-RAM and so forth use the UDF format standardized
by ISO (International Organization for
10 Standardization) 9660.

The file management method is basically premised
on the hierarchical file system that has the root
directory a parent and manages files in a tree form.

Although the following mainly discusses the UDF
15 format that conforms to the DVD-RAM standards (File
System Specifications), most of the contents of this
description conform to the contents of the DVD-ROM
standards.

In recording information on an information storage
20 medium, a collection of information is called filed
data, and recording is carried out file data by file
data. To distinguish file data from another, a unique
file name is added to each file data. Grouping plural
pieces of file data which have common information
25 contents facilitates file management and file
retrieval. This group of plural pieces of file data is
called a folder. A unique directory name (folder name)

is given to each directory (folder). Further, a collection of a plurality of directories (folders) can be collected as an upper-rank group in an upper-rank directory (upper-rank folder). The file data and
5 directories (folders) are generally called files here.

In recording information, all information concerning

- (1) information contents of file data themselves,
 - (2) a file name corresponding to file data and
 - 10 (3) the saving location of file data (under which directory it is to be recorded)
- are recorded on the information storage medium.

Further, all information concerning

- (4) a directory name (folder name) and
 - 15 (5) the location where each directory (folder) belongs [the location of an upper-rank parent director (upper-rank folder)]
- are also recorded on the information storage medium.

The entire recording area on the information
20 storage medium is segmented into logical sectors having a minimum unit of 2048 bytes, with logical sector numbers sequentially affixed to all the logical sectors. In recording information on the information storage medium, information is recorded in the units
25 of logical sectors. The recording position on the information storage medium is managed by the logical sector number of the logical sector where this

information is recorded.

As shown in FIGS. 29 to 31, the logical sector where information about a file structure 486 and file data 487 is recorded is particularly called a logical block too, and a logical block number (LBN) is set in association with the logical sector number (LSN). The length of a logical block, like that of the logical sector, is 2048 bytes.

File management information is recorded in the aforementioned units of logical blocks. The contents that are recorded in each logical block are mainly as follows.

(1) A statement FID (File Identifier Descriptor) indicating information about a file. This describes the type of a file, a file name (root directory name, sub directory name and a file data name, etc.). Described in the FID are the data contents of file data following it, and a statement indicating the recording location of the contents of a directory, i.e., the recording location of a file entry corresponding to the associated file.

(2) A statement FE (File Entry) indicating the recording position of the contents of a file. This describes the position (logical block number) on the information storage medium where information about the data contents of file data and the contents of a directory (sub director or the like) are recorded.

The following will described the features of UDF in comparison with FAT which is used in HDD, FDD, MO and the like.

(1) The minimum unit (minimum logical block size, minimum logical sector size or the like) is large so that it is suitable for recording video information and music information which has a vast amount of information to be recorded. While the logical sector size of the FAT is 512 bytes, the logical sector (block) size of the UDF is larger and 2048 bytes.

(2) According to the FAT, an allocation management table for files to an information storage medium is locally recorded in a concentrated manner on the information storage medium, whereas according to the UDF, file management information can be recorded dispersedly at arbitrary positions on the disk. In the UDF, recording positions of file management information and file data on the disk are described as logical sector (block) numbers in an allocation descriptor.

Since the concentrated management in the file management area is performed in the FAT, the FAT is suitable for the usage that requires frequent change of the file structure (mainly for a frequent rewriting use) (because management information is easily rewritten due to the concentrated recording). Further, as the recording location of file management information is predetermined, a high reliability of the

recording medium (fewer defect areas) is the premise.

As file management information is dispersedly located in the UDF, there are not many significant changes in file structure, the UDF is suitable for the usage (mainly a writing-once use) in which a new file structure is added later in a lower portion of the hierarchical system (mainly a portion lower than the root directory) (because at the time of making additional writing, there are not many changes to the previous file management information). As the recording positions of the dispersed file management information can be designated arbitrarily, it is possible to avoid original defect portions in recoding. Further, as file management information can be recorded at an arbitrary position, the entire file management information can be recorded at one location, thus demonstrating the advantage of the FAT, the UDF can be considered as a higher general-purpose file system.

FIGS. 29 through 31 show the example in which the information of the file system structure in FIG. 35 is recorded on the information storage medium according to the UDF format.

As a method of managing unrecorded positions on an information storage medium, there are following two systems.

(1) Space Bit Map System

Using a space bit map descriptor 470, a "recorded"

or "unrecorded" flag is set in a bit map form with respect to all the logical blocks of the recording area in the information storage medium.

(2) Space Table System

5 Using an unallocated space entry 471, all of unrecorded logical block numbers are described in the list in a short allocation descriptor.

10 Although both systems are shown in FIGS. 29 to 31 for the sake of explanation in the description of this embodiment, actually, both are hardly used together (recorded on the information storage medium) and only one of them is used.

15 The following are the brief description of the contents of main descriptors illustrated in FIGS. 29 to 31.

• Beginning Extended Area Descriptor 445 ... indicates the start position of VRS (Volume Recognition Sequence).

20 • Volume Structure Descriptor 446 ... describes the explanation of the contents of the volume.

• Boot Descriptor 447 ... describes process contents at the booting time.

• Terminating Extended Area Descriptor 448 ... indicates the end of VRS.

25 • Partition Descriptor 450 ... indicates partition information (size or the like). For DVD-RAM, one partition per volume is the fundamental rule.

• Logical Volume Descriptor 454 ... describes the contents of logical volume.

• Anchor Volume Descriptor Pointer 458 ... indicates the recording positions of a main volume descriptor sequence 449 and a reserve volume descriptor sequence 467 in the recording area of the information storage medium.

• Reserved (all 00h byte)] 459-465 ... records a specific descriptor. To secure logical sector numbers, an adjustment area having all "0" recorded is provided therebetween.

• Reserve Volume Descriptor Sequence 467 ... a backup area for information recorded in the main volume descriptor sequence 449.

A description will now be given of an accessing method on the information storage medium to reproduce data contents of, for example, file data H432 shown in FIG. 35, by using the file system information shown in FIGS. 29 to 31.

(1) An attempt is made to reproduce information in the boot descriptor 447 in the area of a volume recognition sequence 444 as a boot area at the time of the information recording/reproducing apparatus is activated or the information storage medium is loaded, the apparatus. A process at the time of booting is initiated along the described contents of the boot descriptor 447. When there is no particularly

designated process at the time of booting,

(2) Information in the logical volume descriptor 454 in the area of the main volume descriptor sequence 449 is reproduced first.

5 (3) A logical volume contents use 455 is described in the logical volume descriptor 454 and the logical block number that indicates the position where a file set descriptor 472 is recorded is described there in the form of a long allocation descriptor LAD
10 (Long Allocation Descriptor). In the example shown in FIGS. 29 to 31, it is recorded in the 100th logical block from LAD (100).

 (4) The 100th logical block (which is 372nd in terms of a logical sector number) is accessed to
15 reproduce the file set descriptor 472. The location (logical block number) where a file entry associated with a root directory A425 is described in the LAD form in a root directory ICB473 in that descriptor. In the example in FIGS. 29 to 31, it is recorded in the 102nd
20 logical block from LAD (102).

 (5) According to the LAD (102) of the root directory ICB473, the 102nd logical block is accessed to reproduce a file entry 475 associated with the root directory A425 and read the position (logical block
25 number) where information about the contents of the root directory A425 is recorded [AD (103)].

(6) The 103rd logical block is accessed to

reproduce information about the contents of the root
directory A425. As file data H432 is located under the
series of a directory D428, an FID associated with the
directory D428 is searched to read the logical block
5 number where a file entry associated with the directory
D428 is recorded [LAD (110) though not illustrated in
FIGS. 29 to 31].

(7) The 110th logical block is accessed to
reproduce a file entry 480 associated with the
10 directory D428 to thereby read the position (logical
block number) where information about the contents of
the directory D428 is recorded [AD (111)].

(8) The 111st logical block is accessed to
reproduce information about the contents of the
15 directory D428. As the file data H432 is located
directly under a sub directory F430, an FID associated
with the sub directory F430 is searched to read the
logical block number where a file entry associated with
the sub directory F430 is recorded [LAD (112) though
20 not illustrated in FIGS. 29 to 31].

(9) The 112nd logical block is accessed to
reproduce a file entry 482 associated with the sub
directory F430 to thereby read the position (logical
block number) where information about the contents of
25 the sub directory F430 is recorded [AD (113)].

(10) The 113rd logical block is accessed to
reproduce information about the contents of the sub

directory F430 and an FID associated with the file data H432 is searched. Then, from there, the logical block number where a file entry associated with the file data H432 is recorded is read out [LAD (114) though not
5 illustrated in FIGS. 29 to 31].

(11) The 114th logical block is accessed to reproduce a file entry 484 associated with the file data H432 to thereby read the position where data contents 489 of the file data H432 are recorded.

10 (12) Information is reproduced from the information storage medium in the order of logical block numbers described in the file entry 484 associated with the file data H432 to thereby read the data contents 489 in the file data H432.

15 A description will now be given of a processing method including accessing in the case of changing the data contents of, for example, the file data H432 by using the file system information shown in FIGS. 29 to 31.

20 (1) A difference between volumes of data contents before and after the changing of the file data H432 should have been acquired, and that value should have been divided by 2048 bytes to compute how many additional logical blocks would be used or how many
25 would become unnecessary in order to record changed data.

(2) An attempt is made to reproduce information

in the boot descriptor 447 in the area of the volume recognition sequence 444 as a boot area at the time of the information recording/reproducing apparatus is activated or the information storage medium is loaded, the apparatus. A process at the time of booting is initiated along the described contents of the boot descriptor 447. When there is no particularly designated process at the time of booting,

(3) The partition descriptor 450 in the main volume descriptor sequence 449 is reproduced first to read information of partition contents use 451 described there. The recording position of a space table or space bit map is indicated in this partition contents use 451 (also called Partition Header Descriptor). The space table position is described in the form of a short allocation descriptor in the column of the space table 452 which is not allocated [AD (50) in the example in FIGS. 29 to 31]. The space bit map position is described in the form of the short allocation descriptor in the column of the space bit map 453 which is not allocated [AD (0) in the example in FIGS. 29 to 31].

(4) An access is made to the logical block number (0) where the space bit map read in the above (3) is described. Space bit map information is read from the space bit map descriptor 470 to search for unrecorded logical blocks and the use of the logical blocks

computed in (1) is registered (process of rewriting information of the space bit map descriptor 470). Or,

(4') An access is made to the logical block number (50) where the space table read in the above (3) is described. Unrecorded logical blocks are searched from USE (AD(*), AD(*), ..., AD(*)) 471 of the space table, and the use of the logical blocks computed in (1) is registered (process of rewriting space table information).

10 Actually, either the process of (4) or (4') is carried out.

(5) Next, information in the logical volume descriptor 454 in the area of the main volume descriptor sequence 449 is reproduced first.

15 (6) The logical volume contents use 455 is described in the logical volume descriptor 454 and the logical block number that indicates the position where the file set descriptor 472 is recorded is described there in the LAD form. In the example in FIGS. 29
20 to 31, it is recorded in the 100th logical block from LAD (100).

(7) The 100th logical block (which is 400th in terms of a logical sector number) is accessed to reproduce the file set descriptor 472. The location
25 (logical block number) where a file entry associated with the root directory A425 is described in the LAD form in the root directory ICB473 in that descriptor.

In the example in FIGS. 29 to 31, it is recorded in the 102nd logical block from LAD (102).

(8) According to the LAD (102) of the root directory ICB473, the 102nd logical block is accessed to reproduce the file entry 475 associated with the root directory A425 and read the position (logical block number) where information about the contents of the root directory A425 is recorded [AD (103)].

(9) The 103rd logical block is accessed to reproduce information about the contents of the root directory A425. As the file data H432 is located under the series of the directory D428, an FID associated with the directory D428 is searched to read the logical block number where a file entry associated with the directory D428 is recorded [LAD (110) though not illustrated in FIGS. 29 to 31].

(10) The 110th logical block is accessed to reproduce the file entry 480 associated with the directory D428 to thereby read the position (logical block number) where information about the contents of the directory D428 is recorded [AD (111)].

(11) The 111st logical block is accessed to reproduce information about the contents of the directory D428. As the file data H432 is located directly under the sub directory F430, an FID associated with the sub directory F430 is searched to read the logical block number where a file entry

associated with the sub directory F430 is recorded
[LAD (112) though not illustrated in FIGS. 29 to 31].

(12) The 112nd logical block is accessed to
reproduce the file entry 482 associated with the sub
5 directory F430 to thereby read the position (logical
block number) where information about the contents of
the sub directory F430 is recorded [AD (113)].

(13) The 113rd logical block is accessed to
reproduce information about the contents of the sub
10 directory F430 and an FID associated with the file data
H432 is searched. Then, from there, the logical block
number where a file entry associated with the file data
H432 is recorded is read out [LAD (114) though not
illustrated in FIGS. 29 to 31].

(14) The 114th logical block is accessed to
15 reproduce the file entry 484 associated with the file
data H432 to thereby read the position where data
contents 489 of the file data H432 are recorded.

(15) In consideration of the logical block
20 numbers additionally registered in the above (4) or
(4'), the data contents 489 in the changed file data
H432 are recorded.

A description will now be given of a method of
erasing specific file data and directory. As an
25 example, a method of erasing the file data H432 or
the sub directory F430 will be discussed.

(1) An attempt is made to reproduce information

in the boot descriptor 447 in the area of the volume recognition sequence 444 as a boot area at the time of the information recording/reproducing apparatus is activated or the information storage medium is loaded, the apparatus. A process at the time of booting is initiated along the described contents of the boot descriptor 447. When there is no particularly designated process at the time of booting,

10 (2) Information in the logical volume descriptor 454 in the area of the main volume descriptor sequence 449 is reproduced first.

15 (3) The logical volume contents use 455 is described in the logical volume descriptor 454 and the logical block number that indicates the position where the file set descriptor 472 is recorded is described there in the LAD form. In the example in FIGS. 29 to 31, it is recorded in the 100th logical block from LAD (100).

20 (4) The 100th logical block (which is 400th in terms of a logical sector number) is accessed to reproduce the file set descriptor 472. The location (logical block number) where a file entry associated with the root directory A425 is described in the LAD form in the root directory ICB473 in that descriptor. 25 In the example in FIGS. 29 to 31, it is recorded in the 102nd logical block from LAD (102).

(5) According to the LAD (102) of the root

directory ICB473, the 102nd logical block is accessed to reproduce the file entry 475 associated with the root directory A425 and read the position (logical block number) where information about the contents of the root directory A425 is recorded [AD (103)].

(6) The 103rd logical block is accessed to reproduce information about the contents of the root directory A425. As the file data H432 is located under the series of the directory D428, an FID associated with the directory D428 is searched to read the logical block number where a file entry associated with the directory D428 is recorded [LAD (110) though not illustrated in FIGS. 29 to 31].

(7) The 110th logical block is accessed to reproduce the file entry 480 associated with the directory D428 to thereby read the position (logical block number) where information about the contents of the directory D428 is recorded [AD (111)].

(8) The 111st logical block is accessed to reproduce information about the contents of the directory D428. As the file data H432 is located directly under the sub directory F430, an FID associated with the sub directory F430 is searched.

Here, to erase the sub directory F430, a "file erase flag" is set to the file characteristics in the FID associated with the sub directory F430. Further, the logical block number where a file entry associated

with the sub directory F430 is recorded is read out
[LAD (112) though not illustrated in FIGS. 29 to 31].
And,

(9) The 112nd logical block is accessed to
5 reproduce the file entry 482 associated with the sub
directory F430 to thereby read the position (logical
block number) where information about the contents of
the sub directory F430 is recorded [AD (113)].

(10) The 113rd logical block is accessed to
10 reproduce information about the contents of the sub
directory F430 and an FID associated with the file data
H432 is searched.

To erase the file data H432, the "file erase flag"
is set to the file characteristics in the FID
15 associated with the file data H432. Further, from
there, the logical block number where a file entry
associated with the file data H432 is recorded is read
out [LAD (114) though not illustrated in FIGS. 29
to 31]. Then,

(11) The 114th logical block is accessed to
20 reproduce the file entry 484 associated with the file
data H432 to thereby read the position where data
contents 489 of the file data H432 are recorded.

Thereafter, the logical block where the data
25 contents 489 in the file data H432 have been recorded
is set free (the logical block is registered in an
unrecorded state) by the following method. That is,

(12) Then, the partition descriptor 450 in the main volume descriptor sequence 449 is reproduced first to read information of the partition contents use 451 described there. The recording position of a space table or space bit map is indicated in this partition contents use 451 (also called Partition Header Descriptor). The space table position is described in the form of a short allocation descriptor in the column of the space table 452 which is not allocated [AD (50) in the example in FIGS. 29 to 31]. The space bit map position is described in the form of the short allocation descriptor in the column of the space bit map 453 which is not allocated [AD (0) in the example in FIGS. 29 to 31].

(13) An access is made to the logical block number (0) where the space bit map read in the above (12) is described to rewrite the "logical block number to be freed" obtained as a result of (11) in the space bit map descriptor 470. Or,

(13') An access is made to the logical block number (50) where the space table read in the above (12) is described to rewrite the "logical block number to be freed" obtained as a result of (11) in the space table.

Actually, either the process of (13) or (13') is carried out.

To erase file data I433,

(12) The position where data contents 490 in the file data I433 are recorded is read through the same procedures as the above (10) to (11).

(13) Then, the partition descriptor 450 in the
5 main volume descriptor sequence 449 is reproduced first to read information of the partition contents use 451 described there. The recording position of a space table or space bit map is indicated in this partition contents use 451 (also called Partition Header
10 Descriptor). The space table position is described in the form of a short allocation descriptor in the column of the space table 452 which is not allocated [AD (50) in the example in FIGS. 29 to 31]. The space bit map position is described in the form of the short
15 allocation descriptor in the column of the space bit map 453 which is not allocated [AD (0) in the example in FIGS. 29 to 31].

(14) An access is made to the logical block number (0) where the space bit map read in the above
20 (13) is described to rewrite the "logical block number to be freed" obtained as a result of (11) and (12) in the space bit map descriptor 470. Or,

(14') An access is made to the logical block number (50) where the space table read in the above
25 (13) is described to rewrite the "logical block number to be freed" obtained as a result of (11) and (12) in the space table.

Actually, either the process of (14) or (14') is carried out.

A description will now be given of a process of adding file data and a directory. As an example, an
5 access and adding method at the time of adding new file data or directory under the sub directory F430 will be discussed.

(1) In the case of adding file data, the volume
of the contents of the file data to be added should
10 have been checked, and that value should have been divided by 2048 bytes to compute the number of logical blocks necessary to add file data.

(2) An attempt is made to reproduce information in the boot descriptor 447 in the area of the volume
15 recognition sequence 444 as a boot area at the time of the information recording/reproducing apparatus is activated or the information storage medium is loaded, the apparatus. A process at the time of booting is initiated along the described contents of the boot
20 descriptor 447. When there is no particularly designated process at the time of booting,

(3) The partition descriptor 450 in the main volume descriptor sequence 449 is reproduced first to read information of the partition contents use 451
25 described there. The recording position of a space table or space bit map is indicated in this partition contents use 451 (also called Partition Header

Descriptor).

The space table position is described in the form of the short allocation descriptor in the column of the space table 452 which is not allocated. AD (50) in the example in FIGS. 29 to 31. The space bit map position is described in the form of the short allocation descriptor in the column of the space bit map 453 which is not allocated. AD (0) in the example in FIGS. 29 to 31.

10 (4) An access is made to the logical block number (0) where the space bit map read in the above (3) is described. Space bit map information is read from the space bit map descriptor 470 to search for unrecorded logical blocks and the use of the logical blocks computed in (1) is registered (process of rewriting information of the space bit map descriptor 470). Or,

15

 (4') An access is made to the logical block number (50) where the space table read in the above (3) is described. Unrecorded logical blocks are searched from USE (AD(*), AD(*), ..., AD(*)) 471 of the space table, and the use of the logical blocks computed in (1) is registered.

20

Actually, either the process of (4) or (4') is carried out.

25 (5) Next, information in the logical volume descriptor 454 in the area of the main volume descriptor sequence 449 is reproduced first.

(6) The logical volume contents use 455 is described in the logical volume descriptor 454 and the logical block number that indicates the position where the file set descriptor 472 is recorded is described there in the LAD form. In the example in FIGS. 29 to 31, it is recorded in the 100th logical block from LAD (100).

(7) The 100th logical block (which is 400th in terms of a logical sector number) is accessed to reproduce the file set descriptor 472. The location (logical block number) where a file entry associated with the root directory A425 is described in the LAD form in the root directory ICB473 in that descriptor. In the example in FIGS. 29 to 31, it is recorded in the 102nd logical block from LAD (102).

(8) According to the LAD (102) of the root directory ICB473, the 102nd logical block is accessed to reproduce the file entry 475 associated with the root directory A425 and read the position (logical block number) where information about the contents of the root directory A425 is recorded [AD (103)].

(9) The 103rd logical block is accessed to reproduce information about the contents of the root directory A425. An FID associated with the directory D428 is searched to read the logical block number where a file entry associated with the directory D428 is recorded [LAD (110) though not illustrated in FIGS. 29

to 31].

(10) The 110th logical block is accessed to reproduce the file entry 480 associated with the directory D428 to thereby read the position (logical
5 block number) where information about the contents of the directory D428 is recorded [AD (111)].

(11) The 111st logical block is accessed to reproduce information about the contents of the directory D428. An FID associated with the sub
10 directory F430 is searched to read the logical block number where a file entry associated with the sub directory F430 is recorded [LAD (112) though not illustrated in FIGS. 29 to 31].

(12) The 112nd logical block is accessed to reproduce the file entry 482 associated with the sub
15 directory F430 to thereby read the position (logical block number) where information about the contents of the sub directory F430 is recorded [AD (113)].

(13) The 113rd logical block is accessed to register the FID of file data or a directory to be
20 newly added in information about the contents of the sub directory F430.

(14) An access is made to the position of the logical block number registered in the above (4) or
25 (4') to record a file entry associated with the file data or directory to be newly added.

(15) An access is made to the position of the

logical block number indicated in the short allocation
descriptor in the file entry in the above (14) to
record the FID of a parent directory associated with
the directory to be added or the data contents of the
5 file data to be added.

According to the file system standards that
conform to the UDF of DVD-RAM, there are following
rules.

* The LSN of the start position of the volume
10 recognition sequence 444 is set to "16".

* Anchor points 456 and 457 are located at two of
the following:

- LSN = 256
- LSN = last LSN - 256
- 15 • LSN = last LSN

FIGS. 36A, 36B, 37A and 37B illustrate an embodiment
which satisfies the logical sector number setting
method shown in FIGS. 32, 33, 34A and 34B while meeting
the above rules.

20 Basically, nothing is recorded yet on a DVD-RAM
layer immediately after placed on the market, except
that it is described in the disk identifier zone
recorded in the rewritable data zone in the lead-in
area shown in FIG. 19 that the lamination structure of
25 the recording layer 6 and the information reproducing
layer 7 having structures as shown in FIGS. 17A and
17B, indicating the pre-initialization state. When

initialization is conducted on the user side before use, the information recording/reproducing apparatus can automatically copy necessary information in the DVD-ROM layer to make it useable. At all the
5 designated addresses for the information in the DVD-ROM layer to be copied, the addresses (LSN or LBN) in the DVD-RAM layer after copying are described. At the time of initialization, the volume recognition sequence 444,
10 the first anchor point 456, the main volume descriptor sequence 449, a logical volume integrity sequence, the space bit map descriptor 470 or the unallocated space entry 471, the file set descriptor 472, the file entry 475 of the root directory, the LADs 476 in the root directory, and so forth are copied in the DVD-RAM layer
15 to be usable.

As the second anchor point 457 and the reserve volume descriptor sequence 467 are located on the last LSN side on the DVD-ROM layer, they need not be copied into the DVD-RAM layer.

20 As another embodiment of this invention, the DVD-ROM layer may be arranged in the first half of LSNs and the DVD-RAM layer in the second half of LSNs as illustrated in FIGS. 34A and 34B earlier. The initializing method in this case becomes as shown in
25 FIGS. 38A, 38B, 39A and 39B.

As apparent from the above, although the anchor points 456 and 457 and the main volume descriptor

sequences 449 and 467 are copied from the DVD-ROM layer in FIGS. 36A, 36B, 37A, 37B, 38A, 38B, 39A and 39B, this is not restrictive and they may not be provided beforehand in the DVD-ROM layer and may be recorded in the DVD-RAM layer for the first time by the information recording/reproducing apparatus when the information recording/reproducing apparatus performs initialization. As another general address setting method, the LSNs of the DVD-RAM layer may be inserted between the LSNs of the DVD-ROM layer as shown in FIG. 34A, or reversely, the LSNs of the DVD-ROM layer may be inserted between the LSNs of the DVD-RAM layer though not illustrated.

The general address setting method of this invention is adapted to an information storage medium which has a plurality of layers including the recording layer.

As shown in FIG. 40, as another embodiment, this invention is adapted to a disk pack cartridge 40 where plural information storage media 42 are accommodated.

Nothing is rewritten on the information storage media 42 immediately after purchase. After purchase, on the user side, the information recording/reproducing apparatus automatically discriminates the quantity and the type (DVD-ROM or DVD-RAM) of the information storage media retained and records

1. unique ID of the multiple disk pack

2. the overall recording volume (including the information reproducing layer)

3. the recording volume of the recording layer

4. the total number of recording layers of the multiple disk pack

5. the recording layer number of each recording layer in the multiple disk pack

in a reserve area in the control data zone in the lead-in area shown in FIG. 18 at the time of initialization.

As the general address (LSN) setting method, this "recording layer number of each recording layer in the multiple disk pack" is used.

That is, younger LSNs are set in order in those recording layers having smaller recording layer numbers as shown in FIG. 41. At the time of initialization, the information recording/reproducing apparatus also automatically records the volume recognition sequence 444, the first anchor point F456, the main volume descriptor sequence 449 and the logical volume integrity sequence in the first recording layer and records the second anchor point 457 and the reserve volume descriptor sequence 467 in the last (n-th one in FIG. 41) recording layer to make them usable.

As described above, in this invention, a multi-purpose information processing apparatus does not have an HDD or application software information or the like, uses an information storage medium having the stacked

recording layer 6 and information reproducing layer 7
and invokes application software recorded on the
information storage medium information and records
formed information on the recording layer 6 of the
5 information storage medium. Further, the multi-purpose
information processing apparatus does not have a tray
for loading the information storage medium. Therefore,
the multi-purpose information processing apparatus
becomes very thin and light. Furthermore, it can be
10 used in multiple purposes by simply changing the
information storage medium. As application software is
provided on the information storage medium, the multi-
purpose information processing apparatus can be made at
a very low cost.

15 Additional advantages and modifications will
readily occur to those skilled in the art. Therefore,
the invention in its broader aspects is not limited to
the specific details and representative embodiments
shown and described herein. Accordingly, various
20 modifications may be made without departing from the
spirit or scope of the general inventive concept as
defined by the appended claims and their equivalents.

WHAT IS CLAIMED IS:

1. An information storage medium having multiple information layers including a recording layer capable of making recording with condensed light, having:

5 general addresses for said multiple information layers and information indicating a condition for setting said general addresses.

2. The information storage medium according to claim 1, wherein address information of information
10 recorded in a setting order of said general addresses is recorded in each information layer.

3. The information storage medium having general addresses for multiple information layers including a recording layer capable of making recording with
15 condensed light and a reproducible information reproducing layer, according to claim 1 or 2, having

 a table having a collection of general addresses of unrecorded areas, and considering that information has already been recorded on said information
20 reproducing layer, general addresses thereof are not described in said table.

4. An information storage medium having multiple information layers including a recording layer capable of making recording with condensed light, having:

25 information to be automatically copied from a specific information layer to another information layer, and control information about automatic copying

of said information.

5. An information storage medium having multiple information layers including a recording layer capable of making recording with condensed light and having
5 general addresses for said multiple information layers, information to be automatically copied from a specific information layer to another information layer, and control information about automatic copying of said information, wherein

10 general addresses corresponding to information recorded on said specific information layer before copying are preset at general addresses at positions where information after copying is to be recorded.

6. An information storage medium having multiple
15 information layers, having:

a structure which has a recording layer capable of making recording with condensed light, in at least one of said multiple information layers, and an information reproducing layer in at least one of said information
20 layers excluding said recording layer, information having been recorded on said information reproducing layer in a form of minute protrusions and recesses; and

a program for executing information processing recorded on said information reproducing layer, and
25 information for recording, on said recording layer, at least part of information processed according to said program recorded on said information reproducing layer.

7. A disk-shaped information storage medium having multiple information layers, wherein addresses whose numbers increase from an outer peripheral side toward an inner peripheral side are set on a predetermined information layer, and control information of information designated by address numbers set from said outer peripheral side are recorded on another information layer.

8. A multi-purpose information processing apparatus having an information input section for inputting information, an information processing section for performing predetermined information processing on said information input by said information input section, an information display section for displaying results of information processing in said information processing section, and an information recording or reproducing section for recording said results of information processing in said information processing section on an information storage medium or reproducing information from an information storage medium and having an opening/closing mechanism section for opening and closing at a time said information storage medium is installed or removed, comprising:

a first body having said information input section and said information recording or reproducing section arranged integrally, and said opening/closing mechanism

section for opening and closing at a time said
information storage medium is installed or removed
being arranged on a surface different from said
information input section; and

5 a second body where said information display
section is arranged, said second body being movably
coupled to said first body.

9. A multi-purpose information processing
apparatus having an information input section for
10 inputting information, an information processing
section for performing predetermined information
processing on said information input by said
information input section, an information display
section for displaying results of information
15 processing in said information processing section,
and an information recording or reproducing section for
recording said results of information processing in
said information processing section on an information
storage medium or reproducing information an informa-
20 tion storage medium and having an opening/closing
mechanism section for opening and closing at a time
said information storage medium is installed or
removed, comprising:

 a first body where said information input section
25 is arranged; and

 a second body having said information display
section and said information recording or reproducing

section arranged integrally, and said opening/closing mechanism section for opening and closing at a time said information storage medium is installed or removed being arranged on a surface different from said information display section, said second body being movably coupled to said first body.

10. A multi-purpose information processing apparatus having an information input section for inputting information, an information processing section for performing predetermined information processing on said information input by said information input section, and an information display section for displaying results of information processing in said information processing section, dispersedly arranged in a plurality of flat bodies movable coupled together in such a way that said flat bodies can take a stacked state and an expanded state, said information display section being so formed as to continuously extend over a plurality of bodies in an expanded state.

11. A multi-purpose information processing apparatus having an information input section for inputting information, an information processing section for performing predetermined information processing on said information input by said information input section, and an information display section for displaying results of information processing in said information processing section, dispersedly

5

ABSTRACT OF THE DISCLOSURE

According to this invention, general addresses are given to a multi-layer information storage medium to facilitate handing of information. That is, it is possible to set generalized addresses for multiple information layers, and information indicating a condition for setting the general addresses, e.g., the contents of a disk ID zone in a rewritable zone of a lead-in area, is recorded on an information reproducing layer.

5

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206

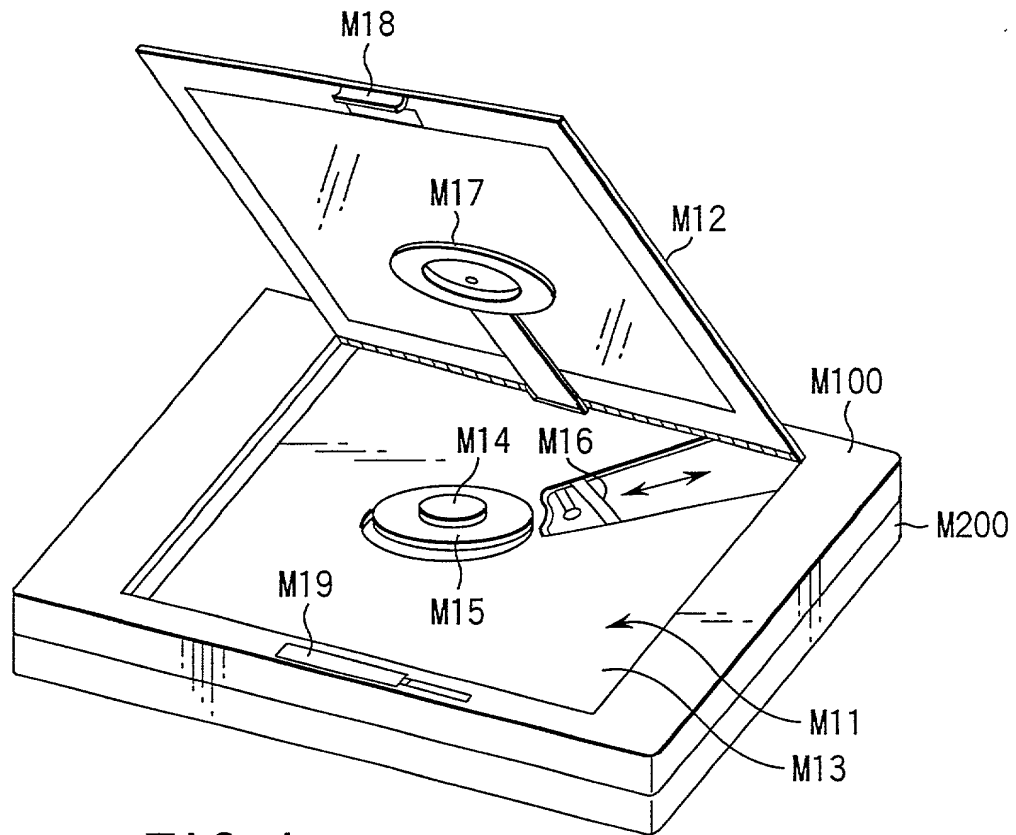


FIG. 1

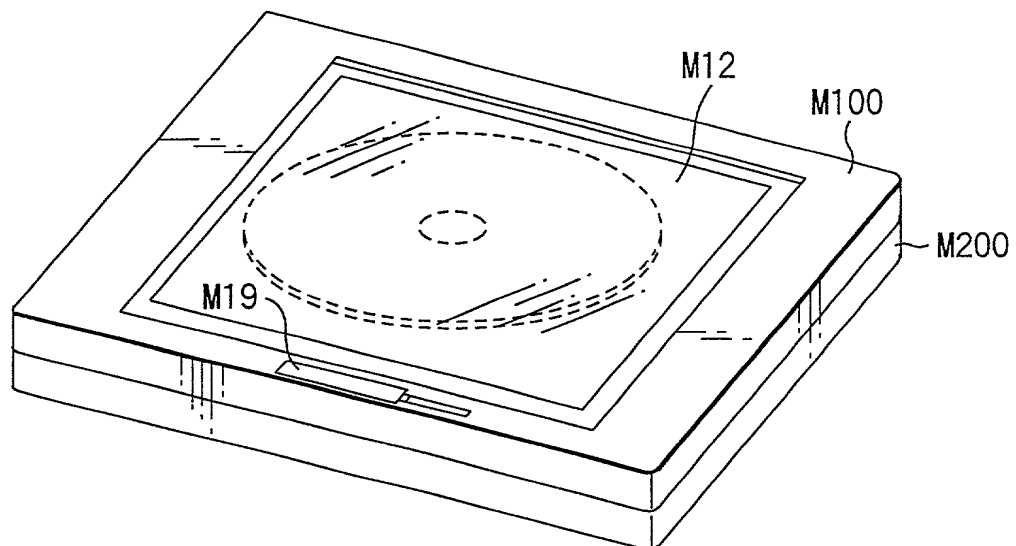


FIG. 2

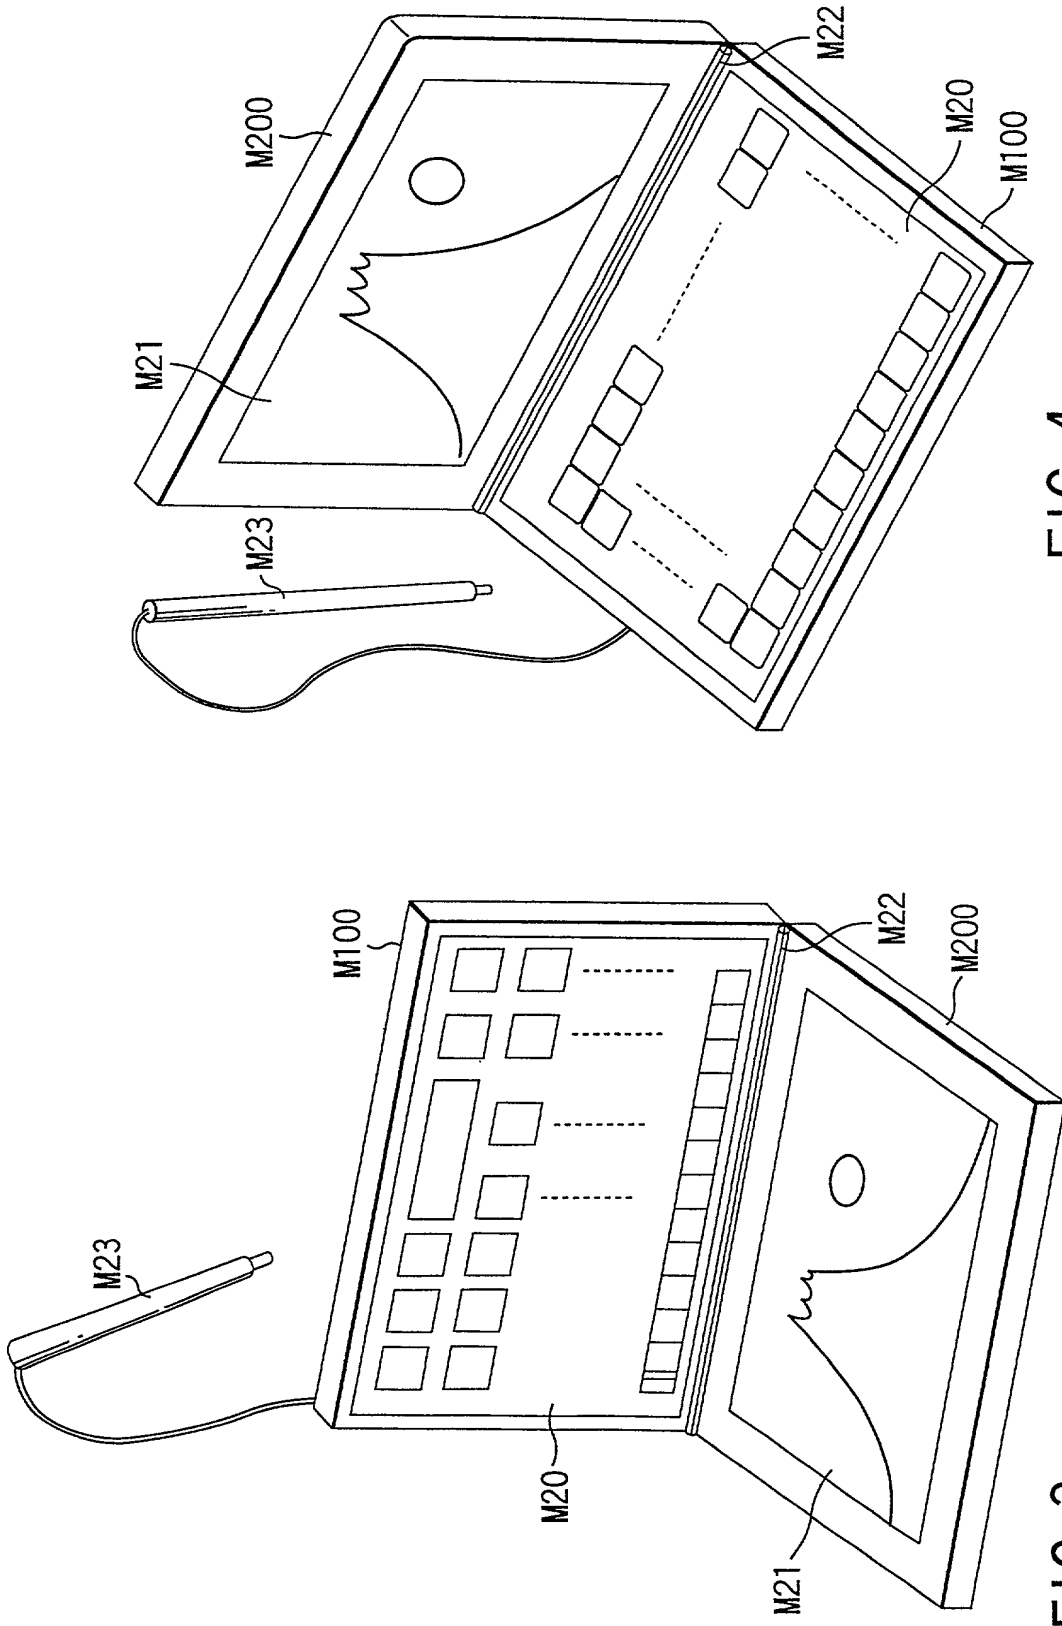


FIG. 4

FIG. 3

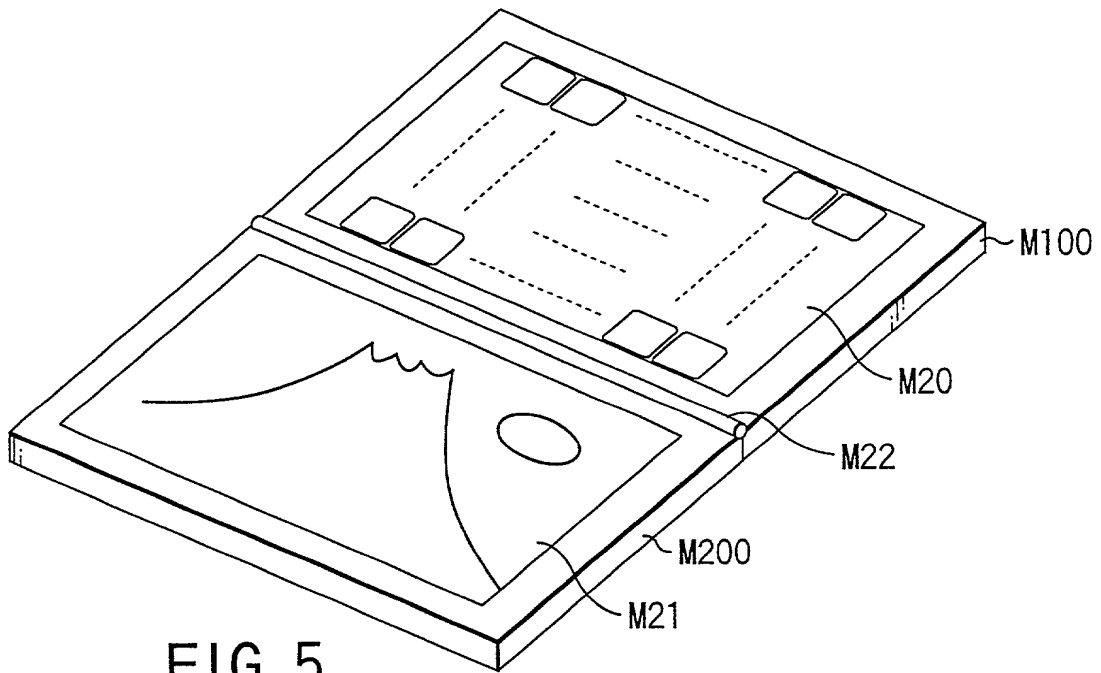


FIG. 5

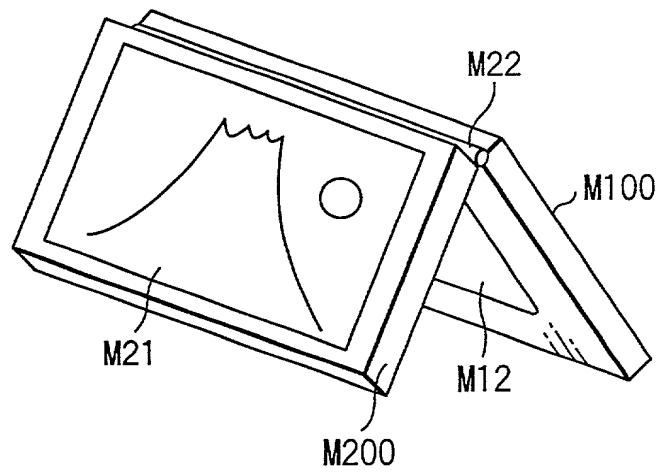


FIG. 6A

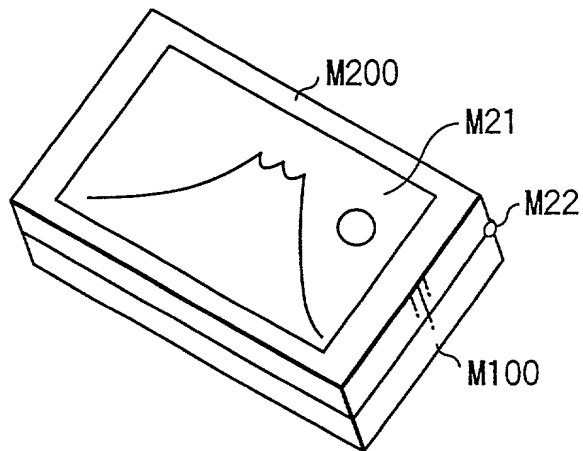


FIG. 6B

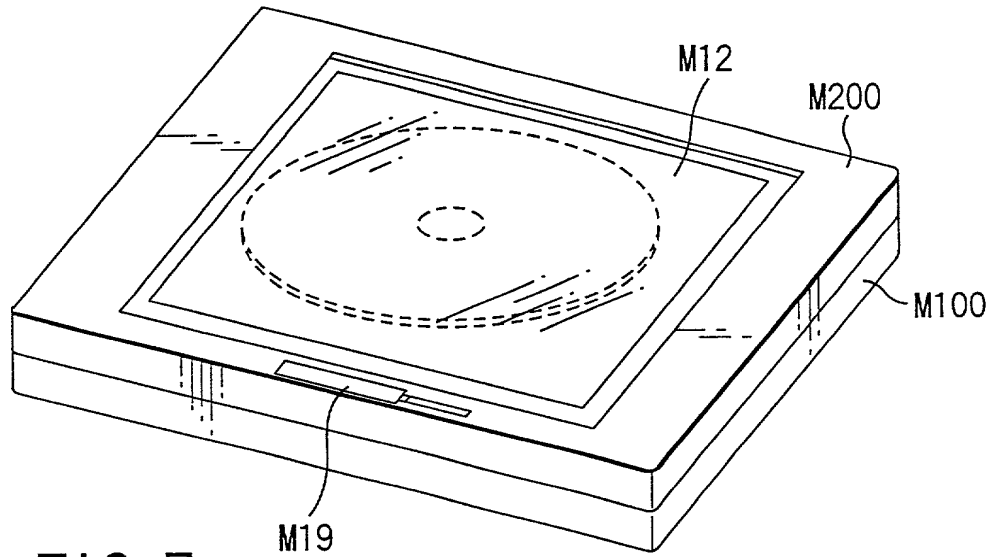


FIG. 7

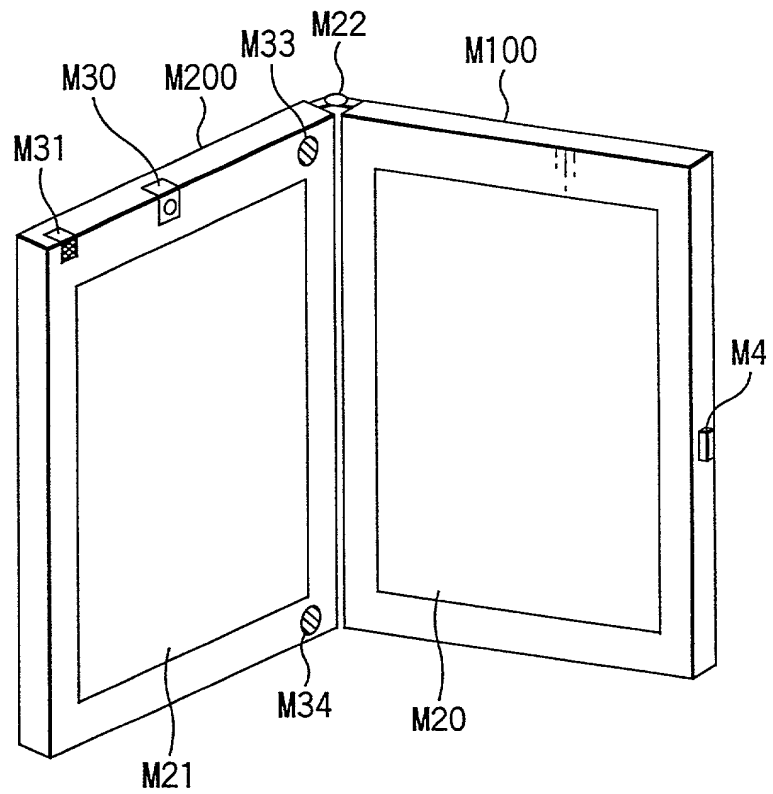


FIG. 8

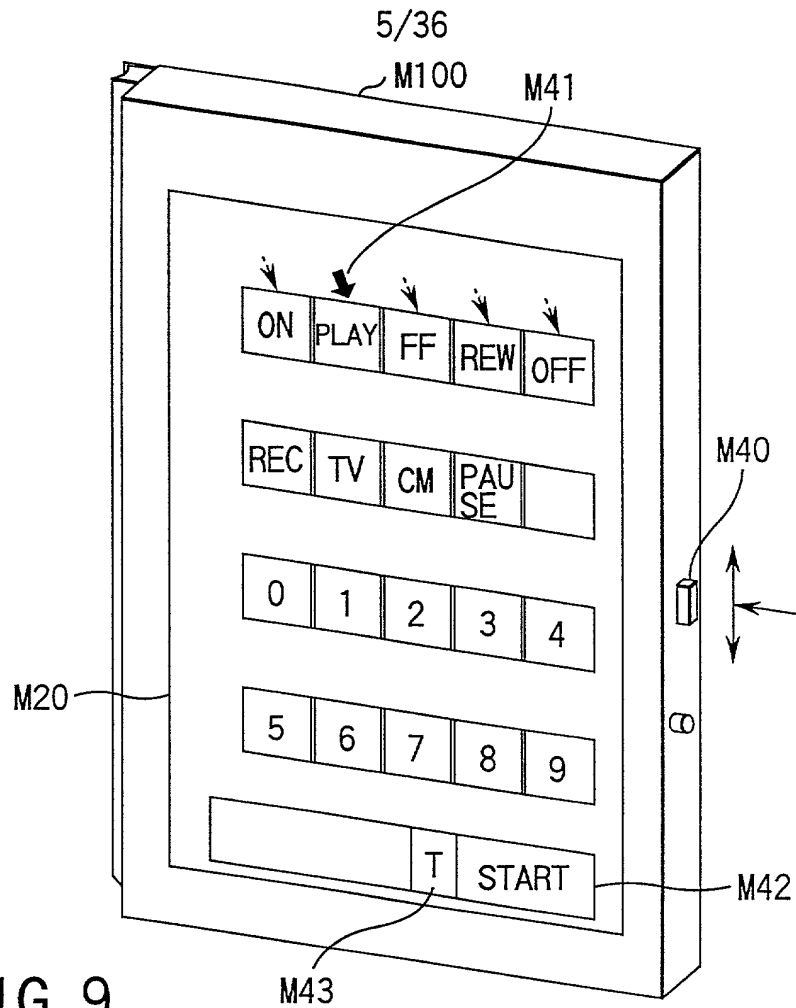


FIG. 9

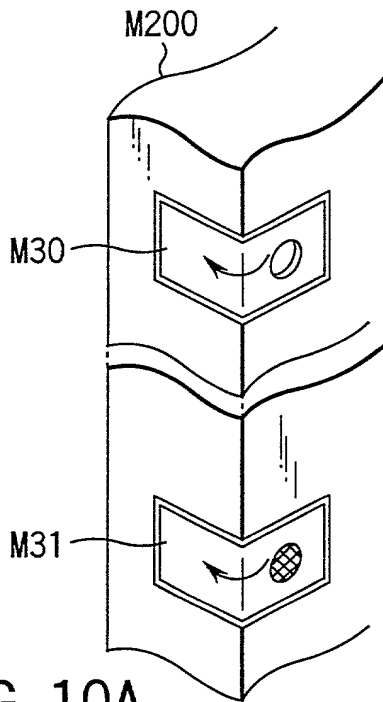


FIG. 10A

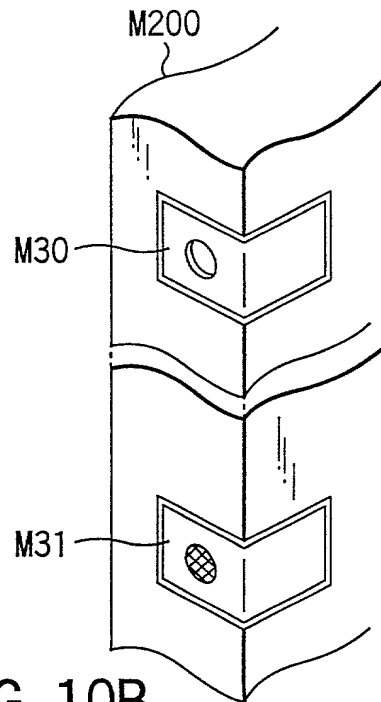


FIG. 10B

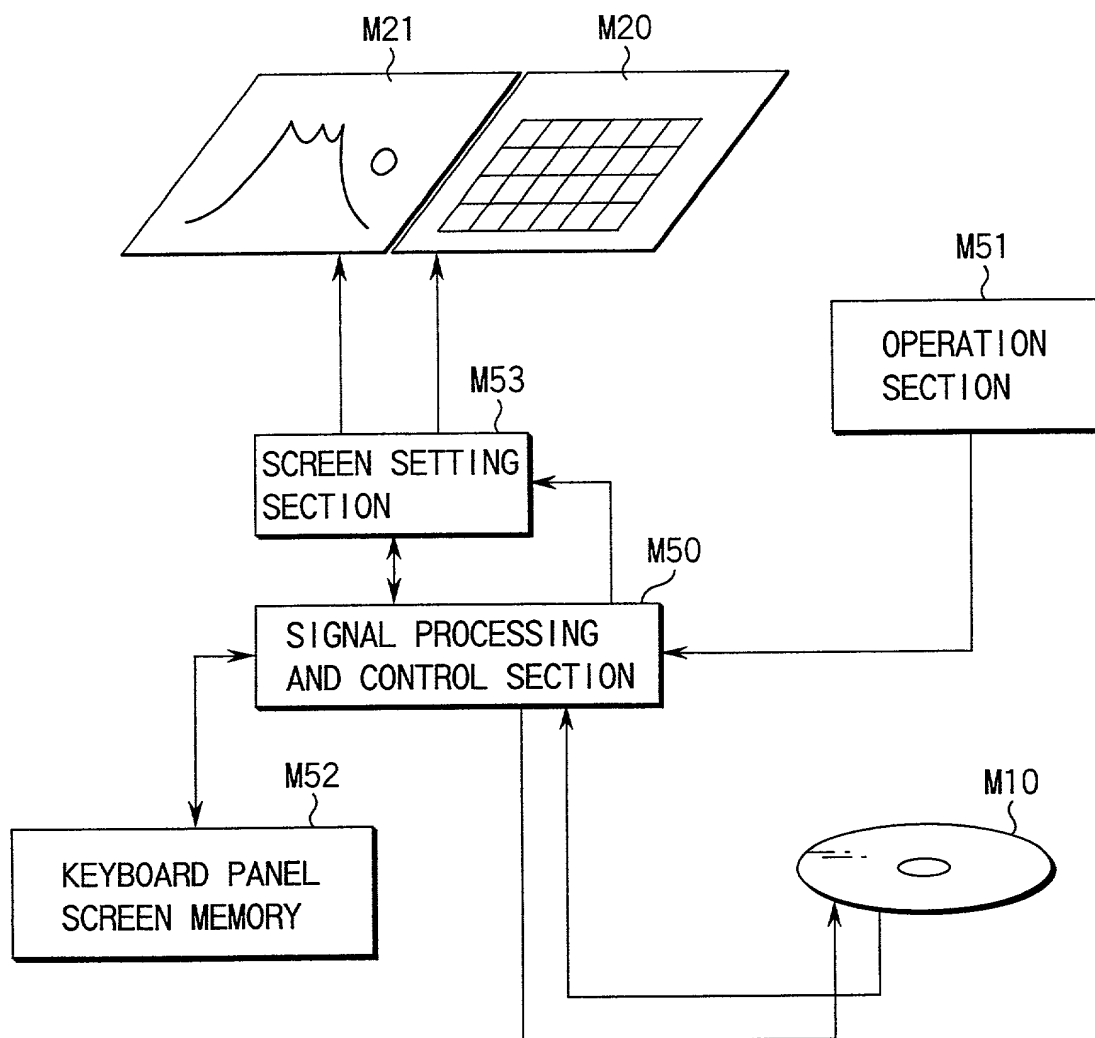


FIG. 11

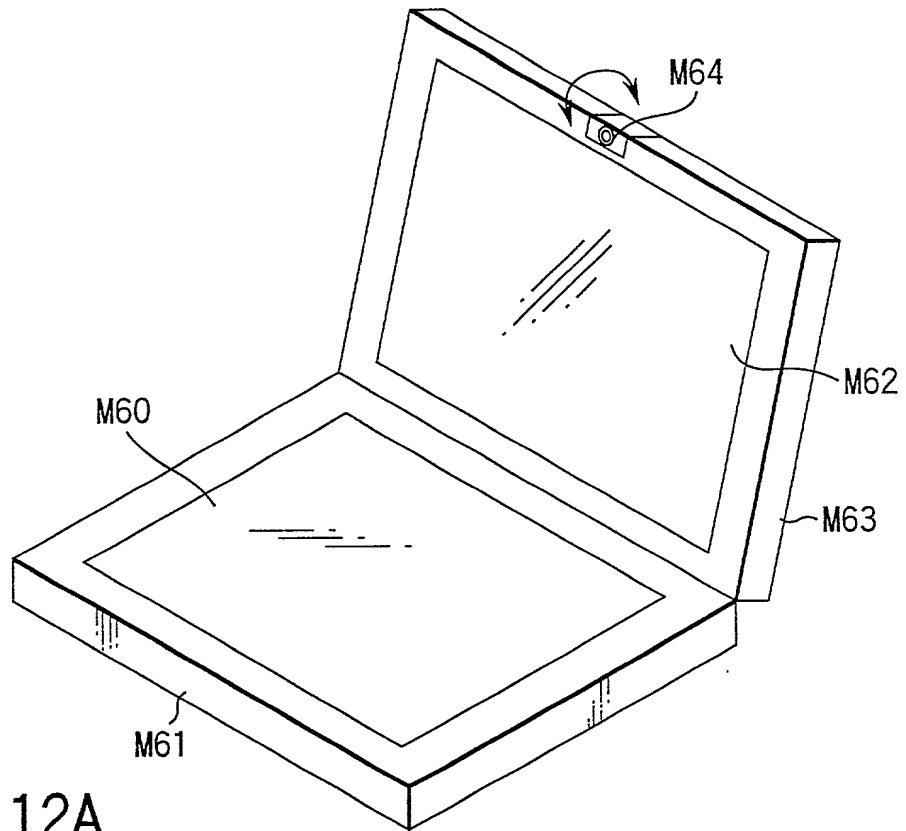


FIG. 12A

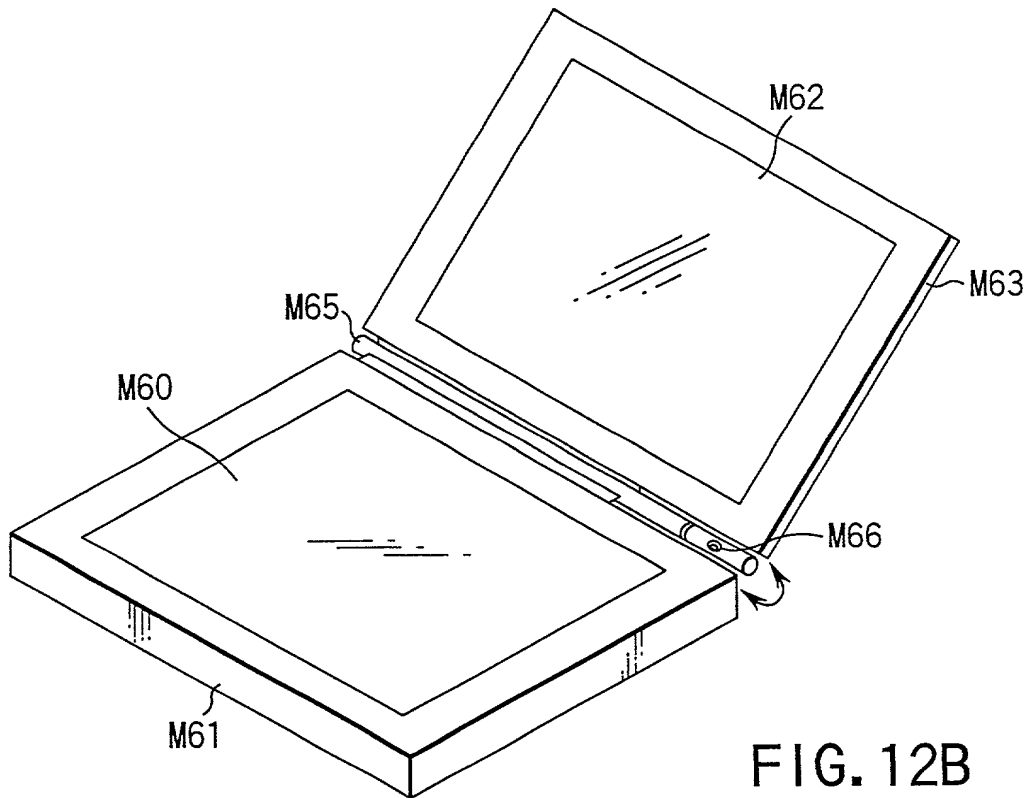


FIG. 12B

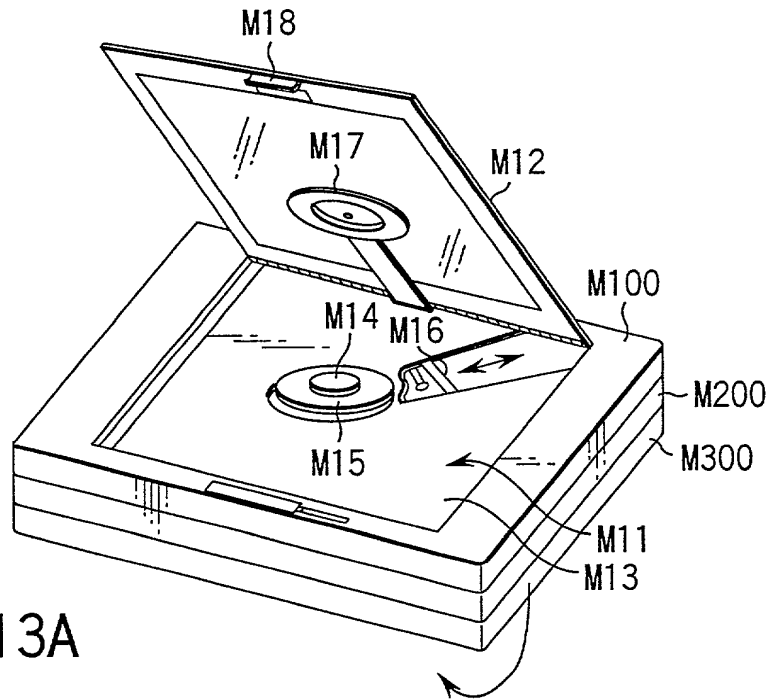


FIG. 13A

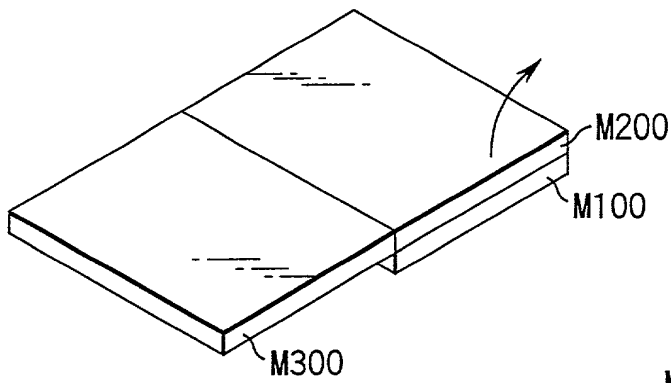


FIG. 13B

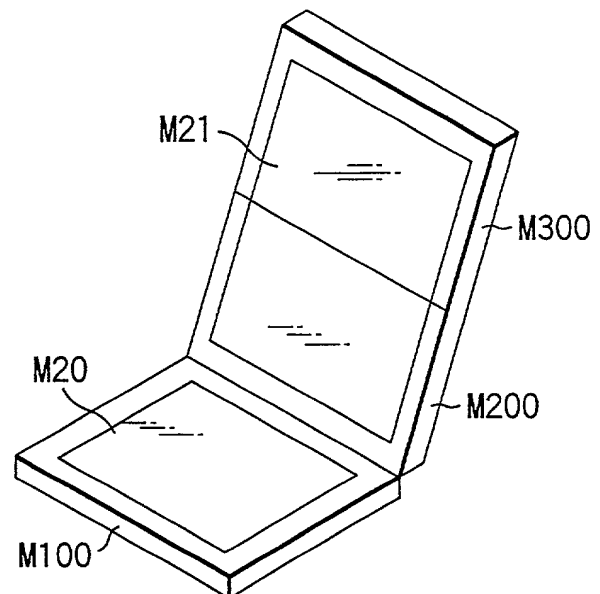


FIG. 13C

9/36

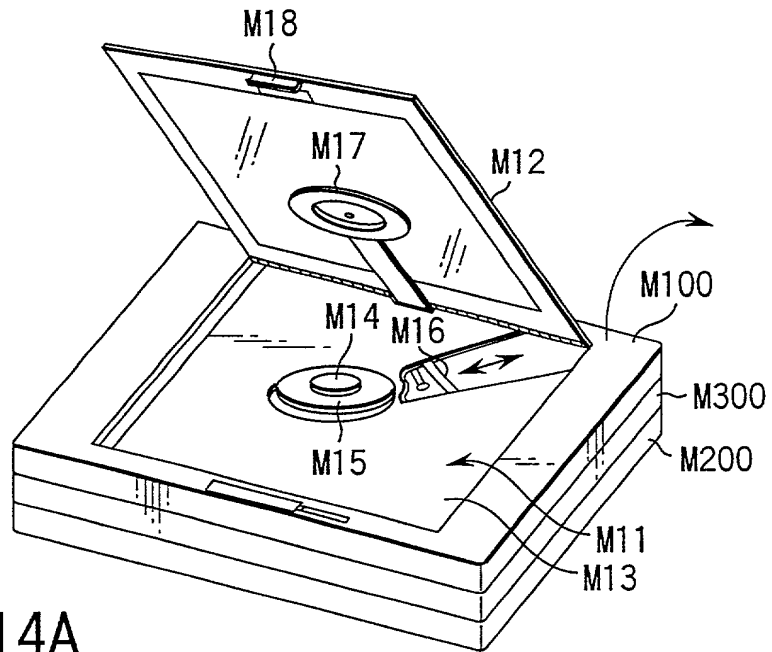


FIG. 14A

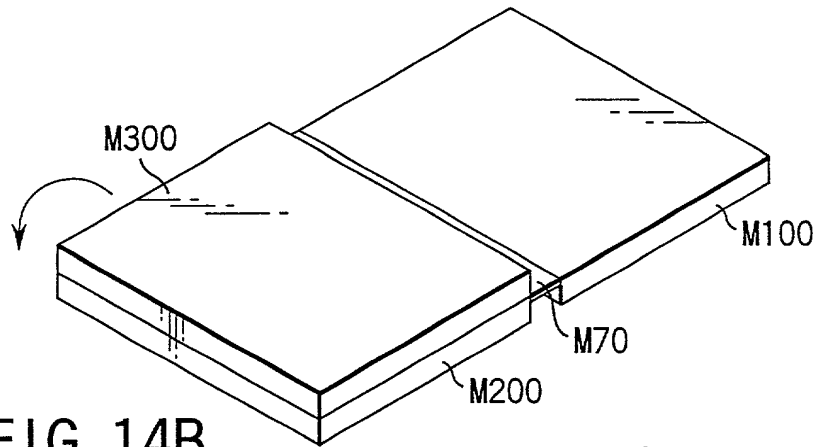


FIG. 14B

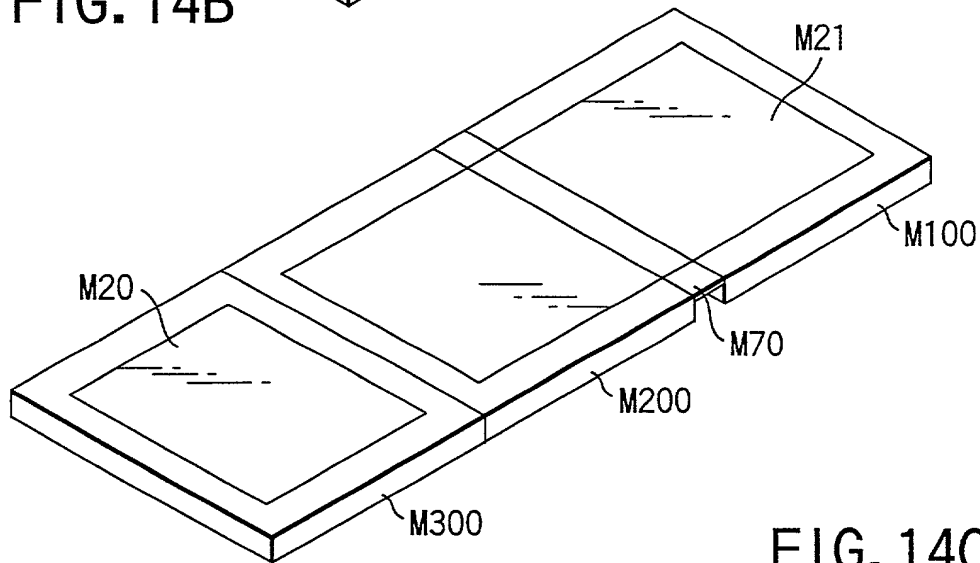


FIG. 14C

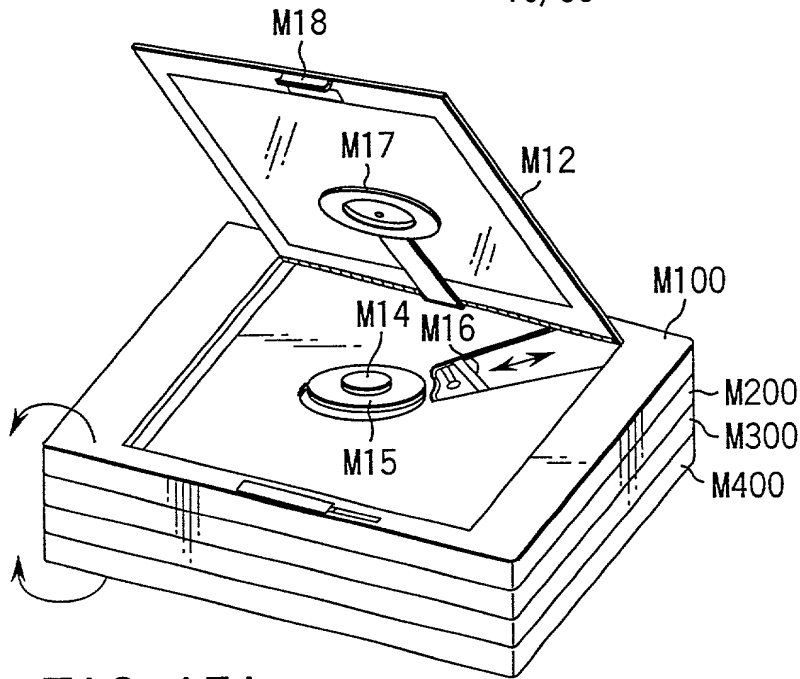


FIG. 15A

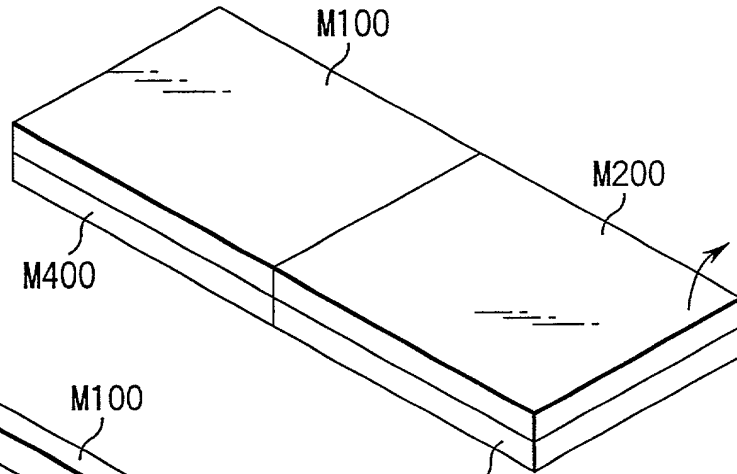


FIG. 15B

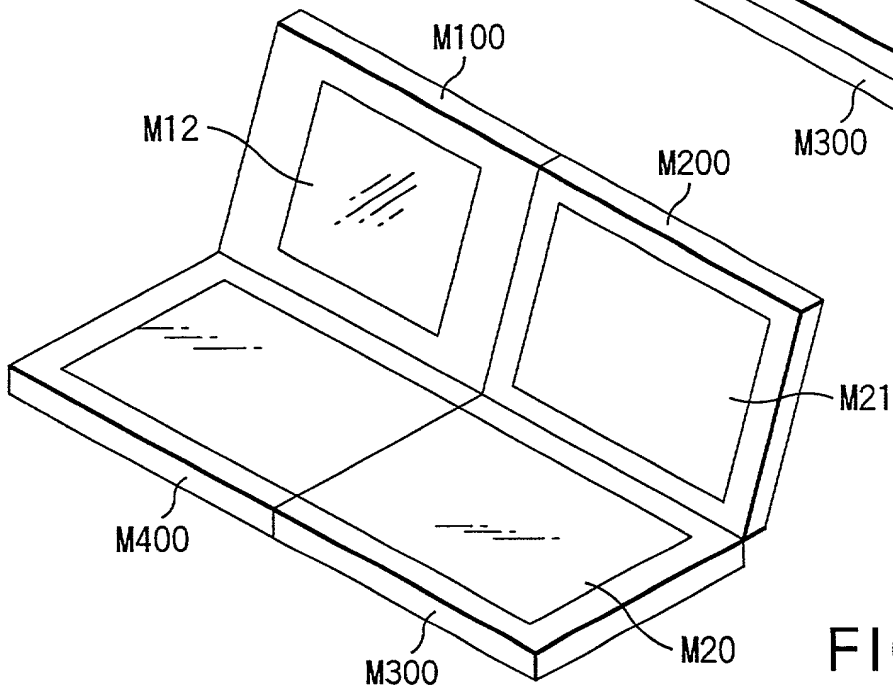


FIG. 15C

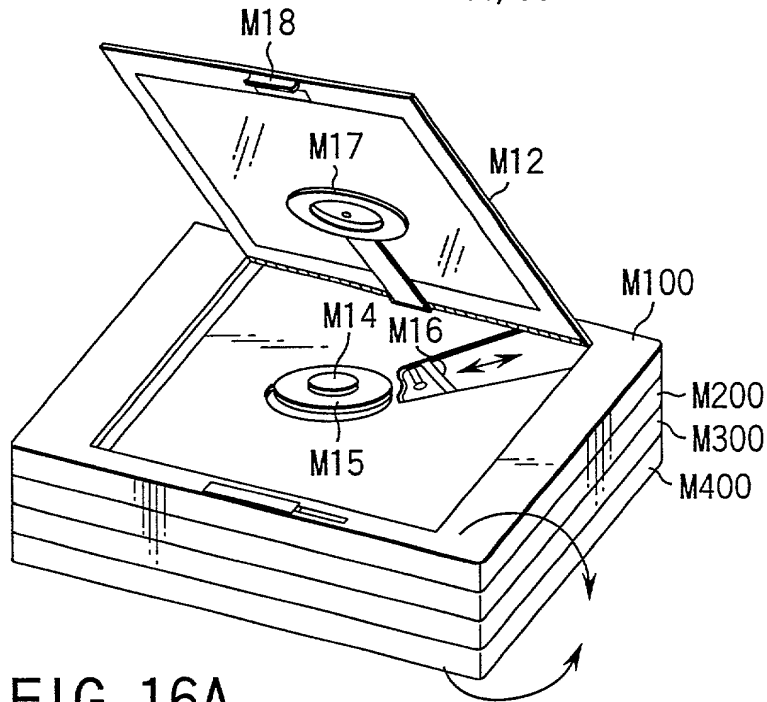


FIG. 16A

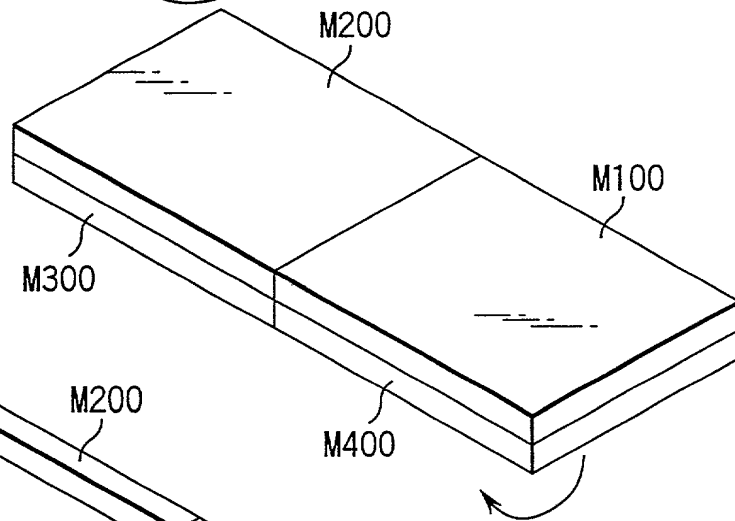


FIG. 16B

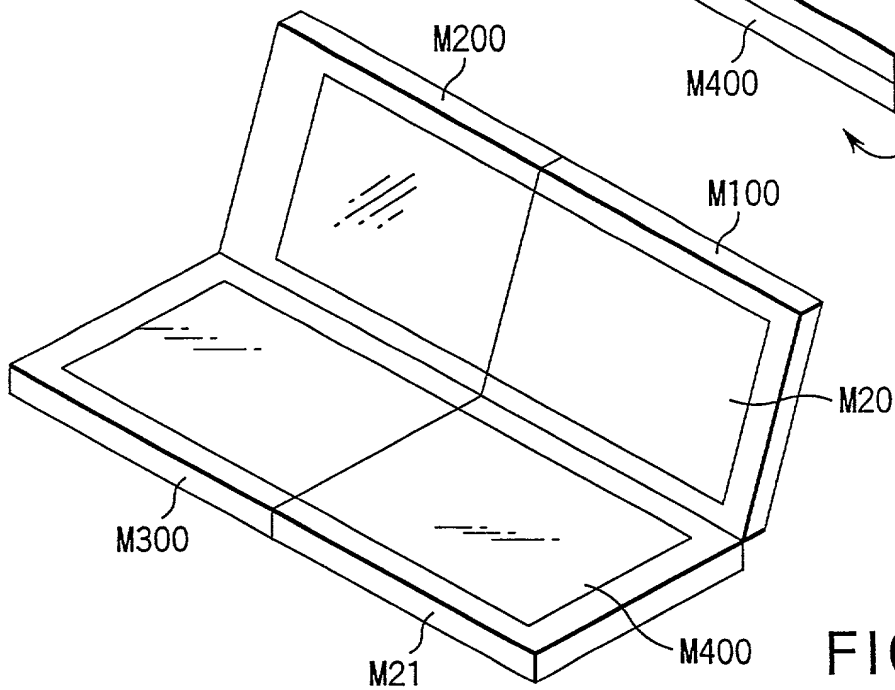


FIG. 16C

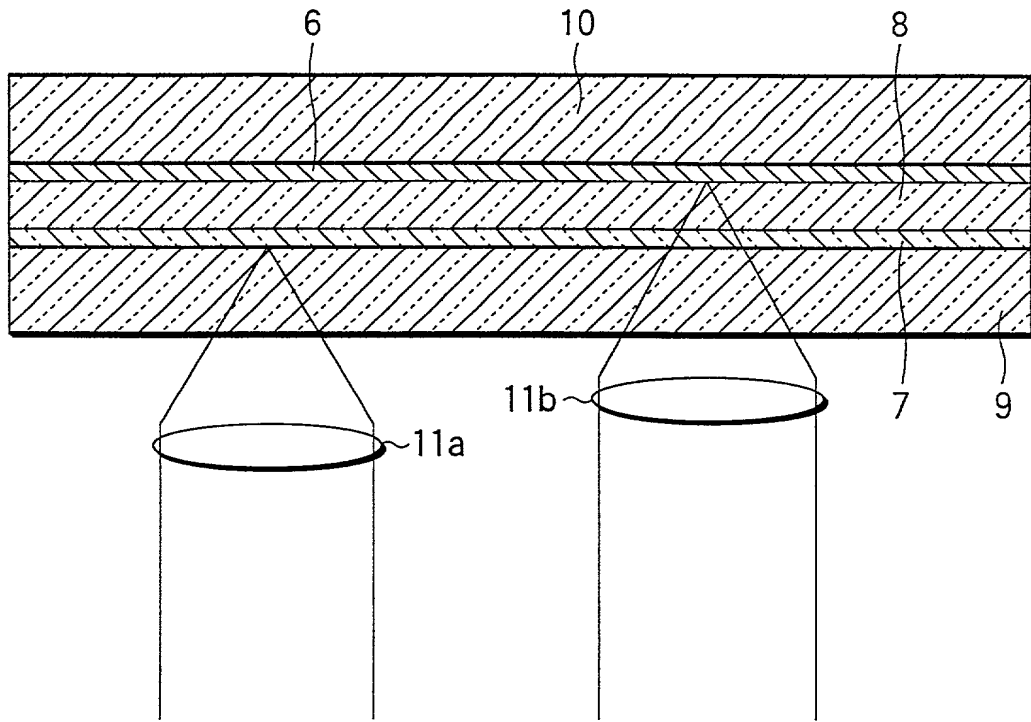


FIG. 17A

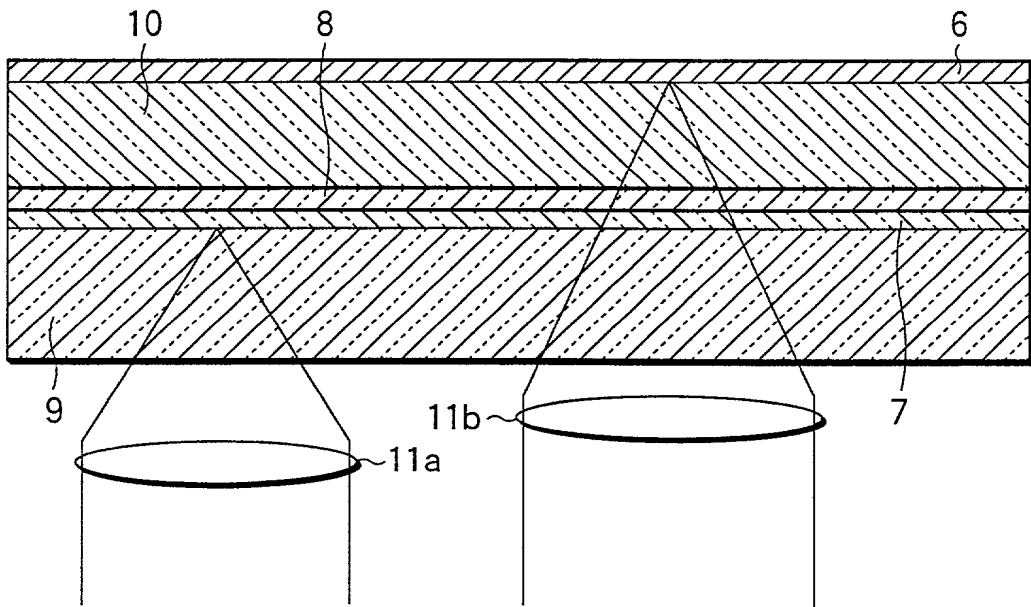


FIG. 17B

	NAME		ROTATIONAL SPEED (Hz)	PHYSICAL SECTOR NUMBER
LEAD-IN	EMBOSS ZONE	REFERENCE SIGNAL ZONE CONTROL DATA ZONE	37.57	27AB0~2FFFF
	MIRROR ZONE	CONNECTION ZONE		
	REWRITABLE ZONE	DISK TEST ZONE DRIVE TEST ZONE DISK ID ZONE DMA1&DMA2	39.78	30000~30FFF
DATA AREA		ZONE00	39.78	31000~37D5F
		ZONE01	37.57	37D60~4021F
		ZONE02	35.59	40220~48E3F
		ZONE03	33.81	48E40~521BF
		ZONE04	32.20	521C0~5BC9F
		ZONE05	30.74	5BCA0~65EDF
		ZONE06	29.40	65EE0~7087F
		ZONE07	28.18	70880~7B97F
		ZONE08	27.05	7B980~871DF
		ZONE09	26.01	871E0~9319F
		ZONE10	25.05	931A0~9F8BF
		ZONE11	24.15	9F8C0~AC73F
		ZONE12	23.32	AC740~B9D1F
		ZONE13	22.54	B9D20~C7A5F
		ZONE14	21.82	C7A60~D5EFF
		ZONE15	21.13	D5F00~E4AFF
		ZONE16	20.49	E4B00~F3E5F
		ZONE17	19.89	F3E60~10391F
		ZONE18	19.32	103920~113B3F
		ZONE19	18.79	113B40~1244BF
		ZONE20	18.28	1244C0~13559F
		ZONE21	17.80	1355A0~146DDF
		ZONE22	17.34	146DE0~158D7F
		ZONE23	16.91	158D80~16B47F
LEAD-OUT	REWRITABLE ZONE	DMA3&DMA4 DISK ID ZONE DRIVE TEST ZONE DISK TEST ZONE	16.91	16B480~17966F

FIG.18

ZONE NAME	CONTENTS OF EACH ZONE	
EMBOSS DATA ZONE	BLANK ZONE	
	REFERENCE SIGNAL ZONE	
	BLANK ZONE	
	CONTROL DATA ZONE	BOOK TYPE & PART VERSION ; DISK SIZE & MINIMUM READ RATE ; DISK STRUCTURE ; RECORDING DENSITY ; DATA AREA ALLOCATION ; BCA (BURST CUTTING AREA) DESCRIPTOR ; SPEED (LINEAR VELOCITY CONDITION FOR DESIGNATING THE AMOUNT OF EXPOSURE) ; READING POWER ; PEAK POWER ; BIAS POWER ; RESERVE ; INFORMATION ABOUT PRODUCTION OF MEDIUM ; RESERVE
	BLANK ZONE	
MIRROR ZONE	CONNECTION ZONE	
REWRI TABLE DATA ZONE	GUARD TRACK ZONE	
	DISK TEST ZONE	
	DRIVE TEST ZONE	
	GUARD TRACK ZONE	
	DISK DESCRIPTOR (ID) ZONE	
	DMA1&DMA2	
.....	ZONE 00 TO ZONE 23 OF DATA AREA	
REWRI TABLE ZONE	DMA3&DMA4	
	DISK DESCRIPTOR (ID) ZONE	
	GUARD TRACK ZONE	
	DRIVE TEST ZONE	
	DISK TEST ZONE	
	GUARD TRACK ZONE	

FIG.19

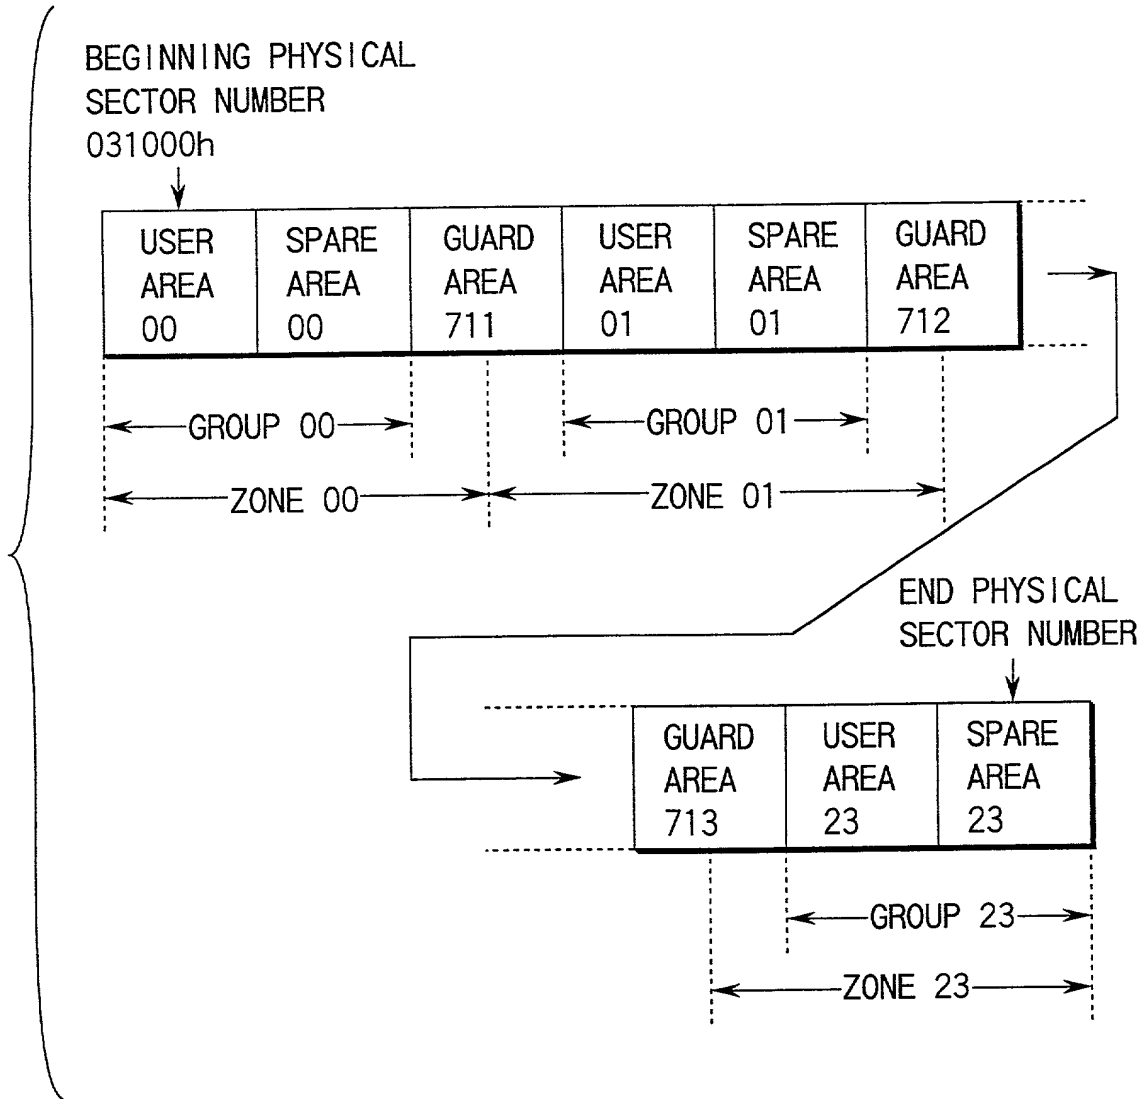


FIG. 20

ZONE NUMBER	SECTOR NUMBER OF GUARD AREA	GROUP			SECTOR NUMBER OF GUARD AREA	LOGICAL SECTOR NUMBER OF HEAD SECTOR IN EACH GROUP
		GROUP NUMBER	USER AREA	SPARE AREA		
			SECTOR NUMBER (NUMBER OF SECTORS)	SECTOR NUMBER		
00	00	31000~ 377DF (26592)	377E0 ~ 37D2F	37D30 ~ 37D5F	0
01	37D60 ~ 37D8F	01	37D90~ 3FB2F (32160)	3FB30 ~ 401EF	401F0 ~ 4021F	26592
02	40220 ~ 4024F	02	40250~ 486EF (33952)	486F0 ~ 48E0F	48E10 ~ 48E3F	58752
03	48E40 ~ 48E6F	03	48E70~ 51A0F (35774)	51A10 ~ 5218F	52190 ~ 521BF	92704
04	521C0 ~ 521EF	04	521F0~ 5B48F (37536)	5B490 ~ 5BC6F	5BC70 ~ 5BC9F	128448
⋮	⋮	⋮	⋮	⋮	⋮	⋮
20	1244C0 ~ 12450F	20	124510~ 13476F (66114)	134770 ~ 13554F	135550 ~ 13559F	943552
21	1355A0 ~ 1355EF	21	1355F0~ 145F4F (67936)	145F50 ~ 146D8F	146D90 ~ 146DDF	1009696
22	146DE0 ~ 146E2F	22	146E30~ 157E8F (69728)	157E90 ~ 158D2F	158D30 ~ 158D7F	1077632
23	158D80 ~ 158DCF	23	158DD0~ 16A57F (71600)	16A580 ~ 16B47F	1147360

FIG. 21

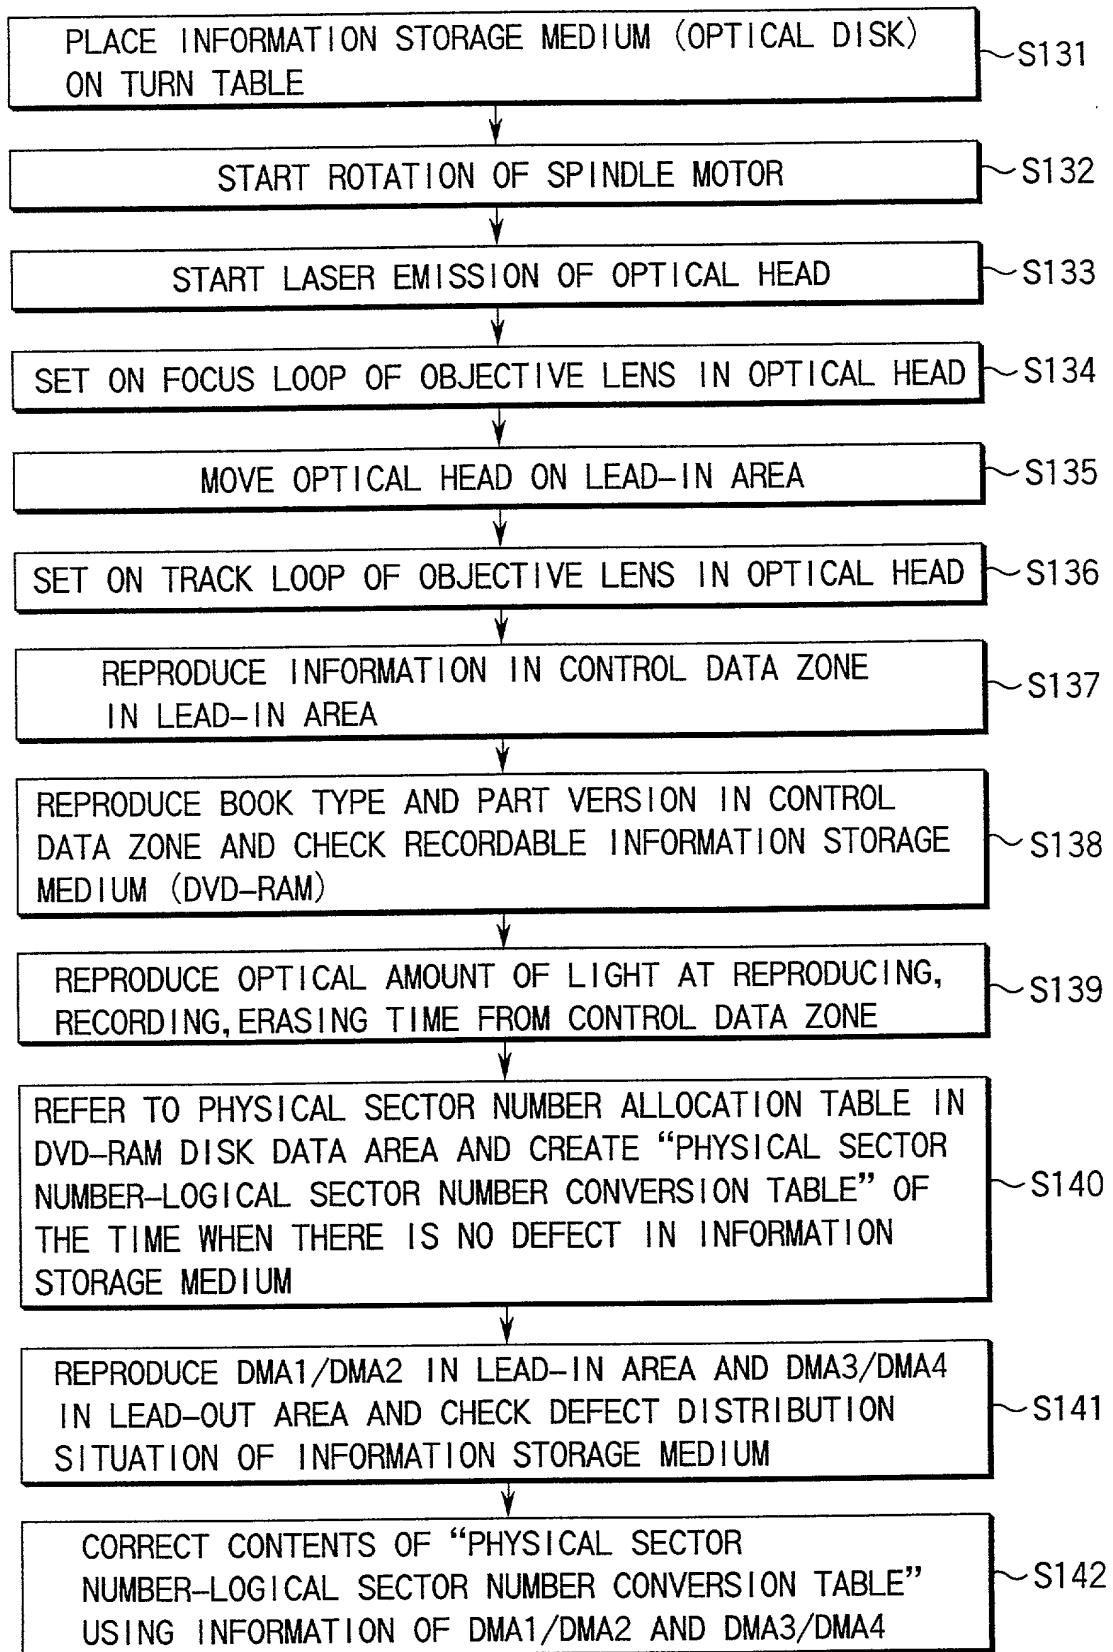


FIG. 22

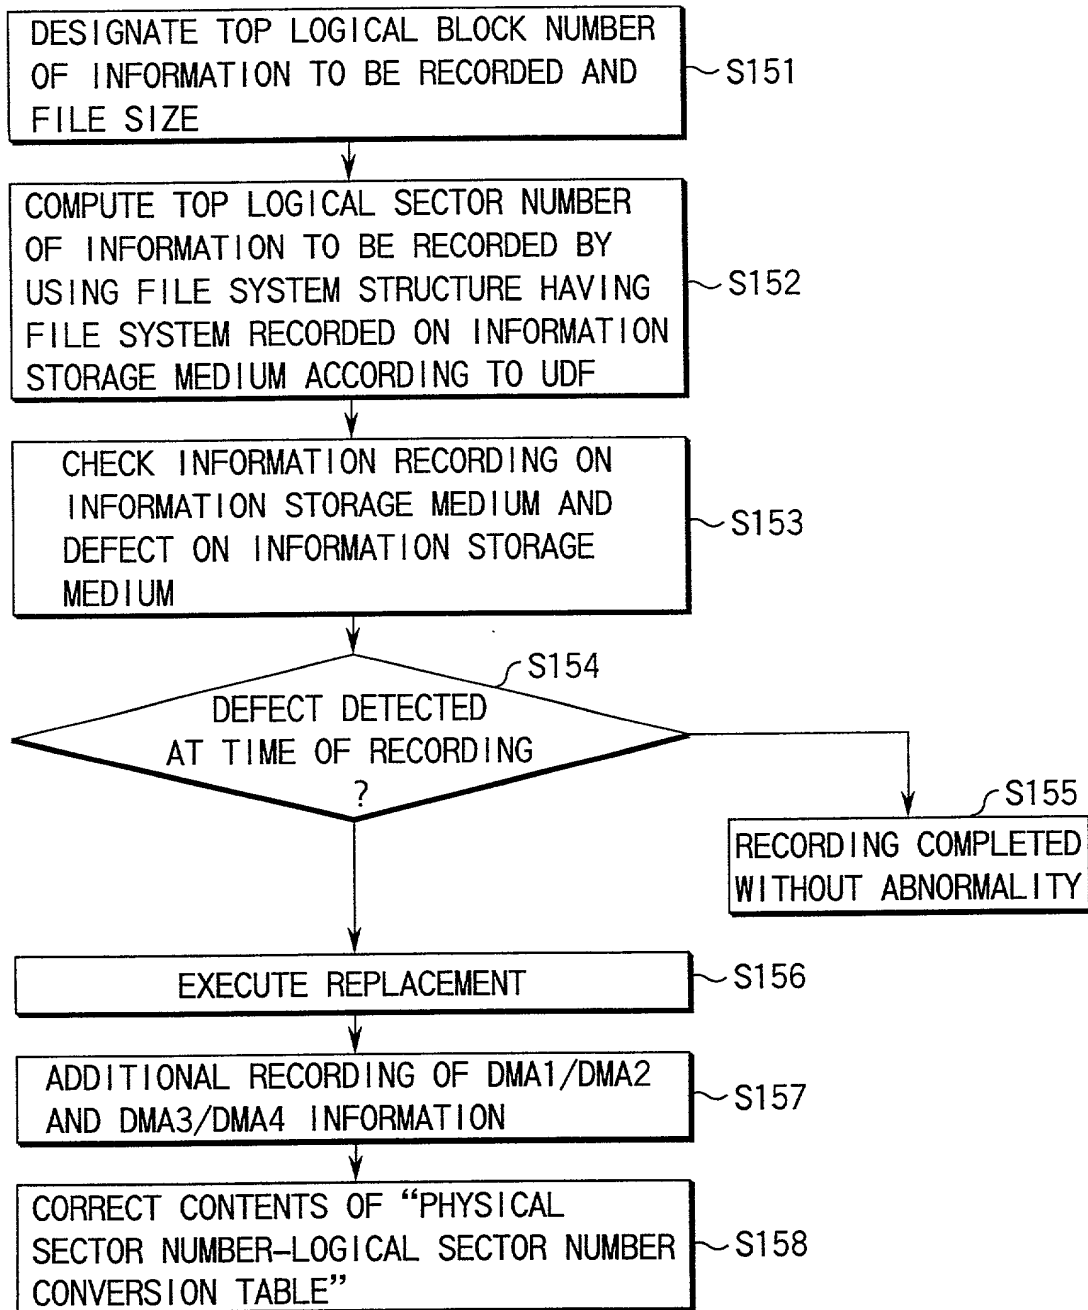


FIG. 23


INSIDE DVD-ROM LEAD-IN AREA

FIG. 25

DETAILED INFORMATION CONTENTS	NUMBER OF USE BYTES
BOOK TYPE AND PART VERSION	1BYTE
DISK SIZE AND MINIMUM READOUT RATE	1BYTE
DISK STRUCTURE	1BYTE
RECORDING DENSITY	1BYTE
DATA AREA ALLOCATION	12BYTES
BCA DESCRIPTOR	1BYTE
RESERVE	15BYTES
RESERVE	2016BYTES


DETAILED INFORMATION CONTENTS OF PHYSICAL FORMAT
INFORMATION

FIG. 26

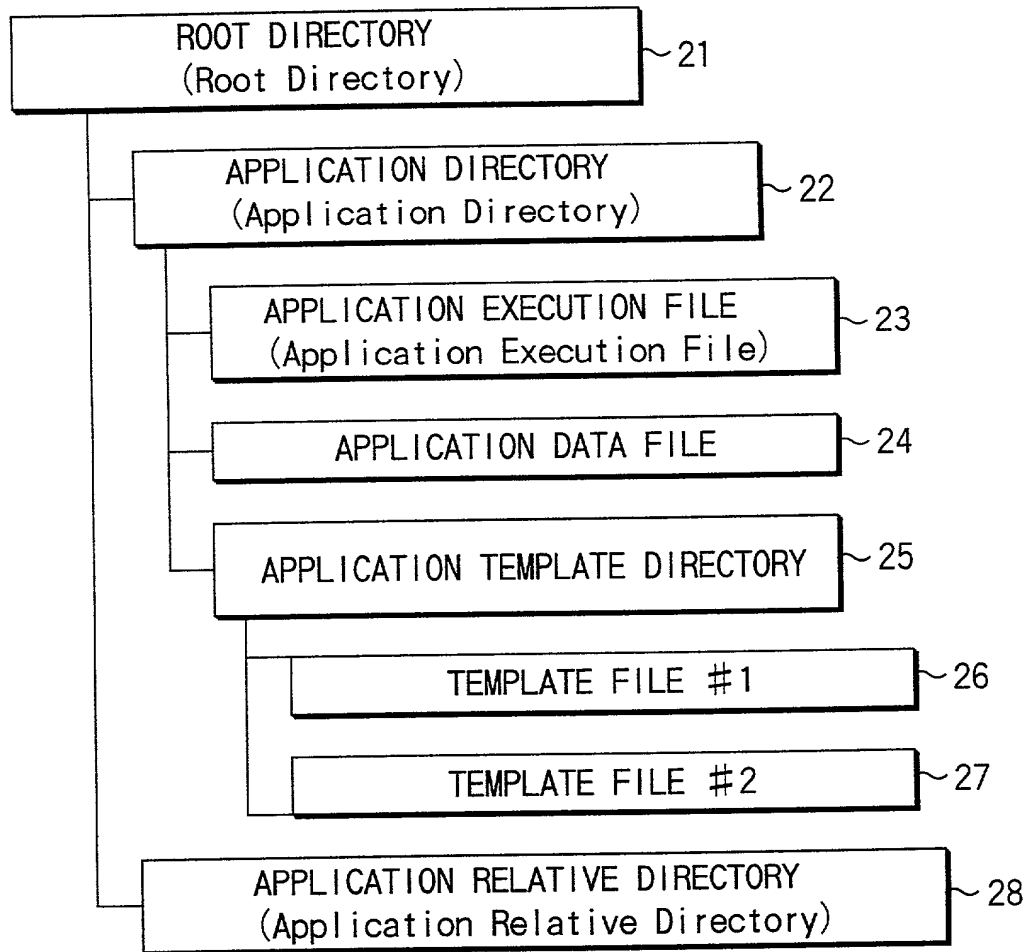

DIRECTORY STRUCTURE OF INFORMATION
RECORDED ON INFORMATION STORAGE MEDIUM

FIG. 27

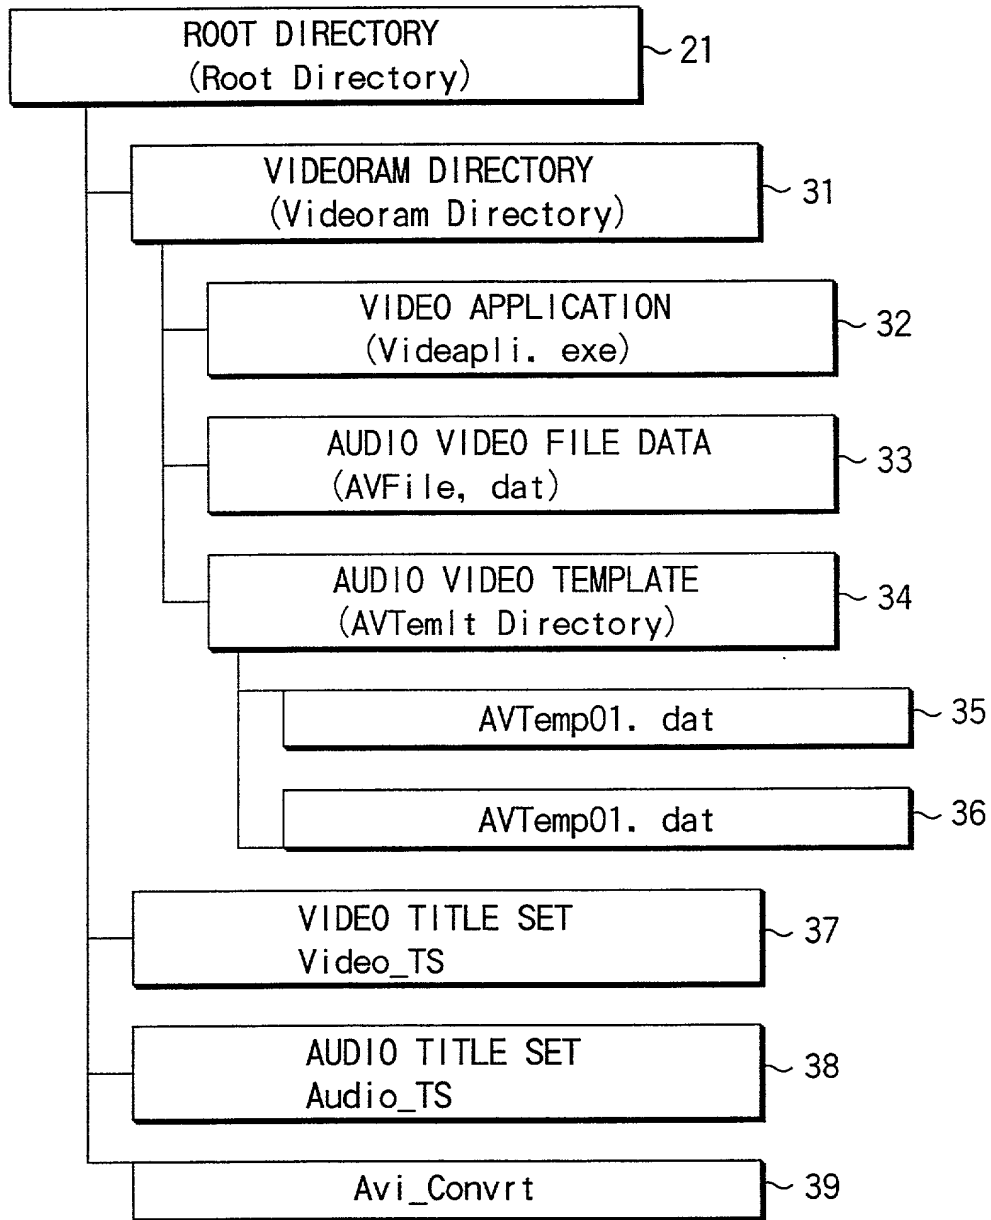

DIRECTORY STRUCTURE OF INFORMATION STORAGE MEDIUM
FOR VIDEO INFORMATION PROCESSING

FIG. 28

LSN	LBN	STRUCTURE 411	DESCRIPTOR 442	CONTENTS 443
0~15			RESERVE 459 (ALL 00h BYTES)	
16		VOLUME RECOGNITION SEQUENCE 444	BEGINNING EXTENDED AREA DESCRIPTOR 445	VRS START POSITION
17			VOLUME STRUCTURE DESCRIPTOR 446	EXPLANATION OF DISK CONTENTS
18			BOOT DESCRIPTOR 447	BOOT START POSITION
19			TERMINATING EXTENDED AREA DESCRIPTOR 448	VRS END POSITION
~31			RESERVE 460 (ALL 00h BYTES)	
32~		MAIN VOLUME DESCRIPTOR SEQUENCE 449	OMITTED	
34			PARTITION DESCRIPTOR 450 PARTITION CONTENTS USE 451 SPACE TABLE 452 WHICH IS NOT ALLOCATED AD (80) SPACE BIT MAP 453 WHICH IS NOT ALLOCATED AD (0)	RECORDING POSITION OF SPACE TABLE RECORDING POSITION OF SPACE BIT MAP
35			LOGICAL VOLUME DESCRIPTOR 454 LOGICAL VOLUME CONTENTS USE 455 LAD (100)	RECORDING POSITION OF FILE SET DESCRIPTOR 472
~47			OMITTED	
~63			OMITTED	
~255			RESERVE 461 (ALL 00h BYTES)	
256		FIRST ANCHOR POINT 456	ANCHOR VOLUME DESCRIPTOR POINTER 458	
~271			RESERVE 462 (ALL 00h BYTES)	

FIG. 29

272 ~ 321	0 ~ 49	FILE STRUCTURE 486	SPACE BIT MAP DESCRIPTOR 470	MAPPING OF RECORDING/ UNRECORDING OF SPACE BIT MAP
322 ~ 371	50 ~ 99		USE(AD(*),AD(*),..., AD(*)) 471	LIST OF EXTENTS OF UNRECORDED STATE OF SPACE TABLE
372	100		FILE SET DESCRIPTOR 472; ROOT DIRECTORY ICB473; LAD(102) 474	RECORDING POSITION OF ROOT DIRECTORY FE
373	101		OMITTED	
374	102		ROOT DIRECTORY AFE(AD(103)) 475	RECORDING POSITION OF FID _s
375	103		A'S FID(LAD(104),LAD(110)) 476	FE POSITION OF B,D
376	104		PARENT DIRECTORY EFE(AD(105)) 477	RECORDING POSITION OF FID _s
377	105		B'S FID(LAD(106)) 478	FE POSITION OF C
378	106		FE(AD(107)AD(108)AD(109)) 479	FILE DATA POSITION
382	110		FE OF DIRECTORY D(AD(111)) 480	RECORDING POSITION OF FID _s
383	111		D'S FID(LAD(112),LAD(NONE)) 481	FE POSITION OF E,F
384	112		FE OF SUB DIRECTORY F(AD(113)) 482	RECORDING POSITION OF FID _s
385	113		FID(LAD(NONE), LAD(114),LAD(118)) 483	FE POSITION OF H,I
386	114		FE(AD(115)AD(116)AD(117)) 484	FILE DATA POSITION
390	118		I'S FE(AD(119),AD(120)) 485	FILE DATA POSITION
379~	107~	FILE DATA 487	INFORMATION OF FILE DATA C 488	
387~	115~		INFORMATION OF FILE DATA H 489	
391~	119~		INFORMATION OF FILE DATA I 490	

FIG. 30

LLSN-271 ~ LLSN-257		RESERVE 463 (ALL 00h BYTES)	
LLSN-256	SECOND ANCHOR POINT 457	ANCHOR VOLUME DESCRIPTOR POINTER 458	
LLSN-255 ~ LLSN-224		RESERVE 464 (ALL 00h BYTES)	
LLSN-223 ~ LLSN-208	RESERVE VOLUME DESCRIPTOR SEQUENCE 467	PARTITION DESCRIPTOR 450 PARTITION CONTENTS USE 451 SPACE TABLE 452 WHICH IS NOT ALLOCATED SPACE BIT MAP 453 WHICH IS NOT ALLOCATED LOGICAL VOLUME DESCRIPTOR 454 LOGICAL VOLUME CONTENTS USE 455	BACKUP OF MAIN VOLUME DESCRIPTOR SEQUENCE
LLSN-207 ~ LLSN		RESERVE 465 (ALL 00h BYTES)	

NOTE 1>LSN = LOGICAL SECTOR NUMBER 491
 LBN = LOGICAL BLOCK NUMBER 492
 LLSN = LAST LOGICAL SECTOR NUMBER 493

FIG. 31

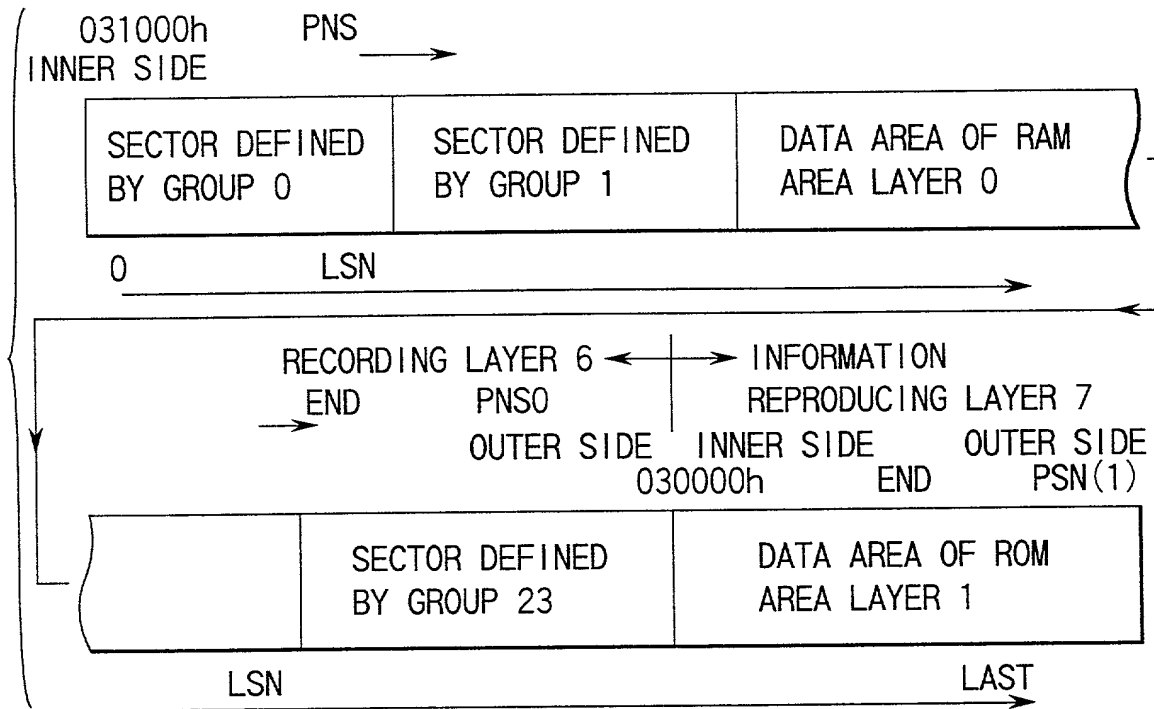


FIG. 32

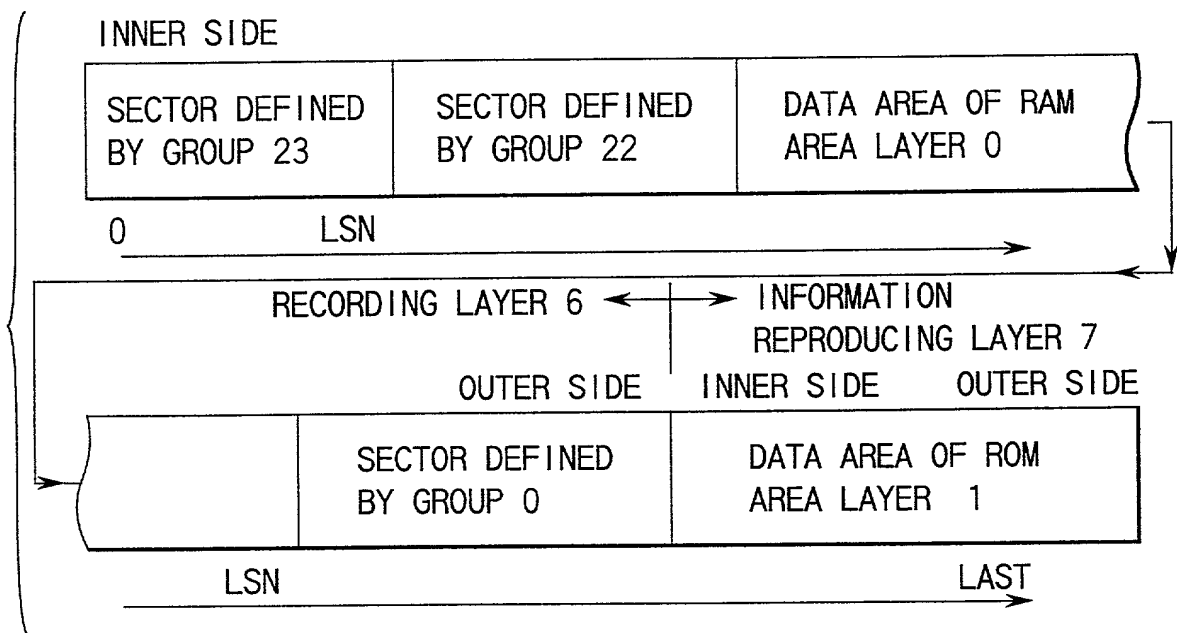


FIG. 33

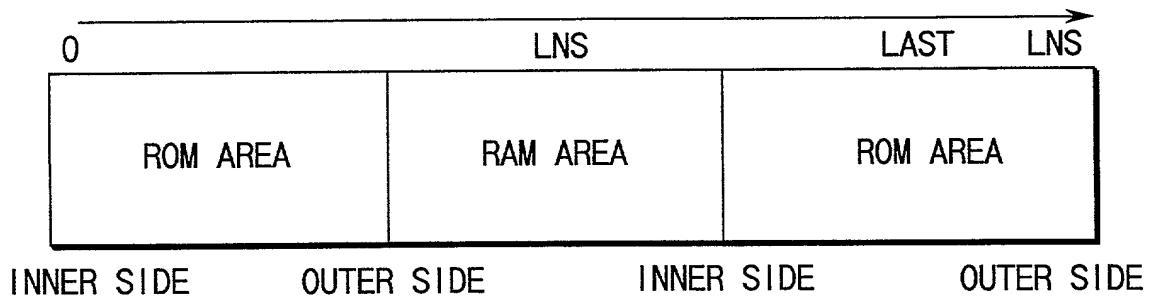


FIG. 34A

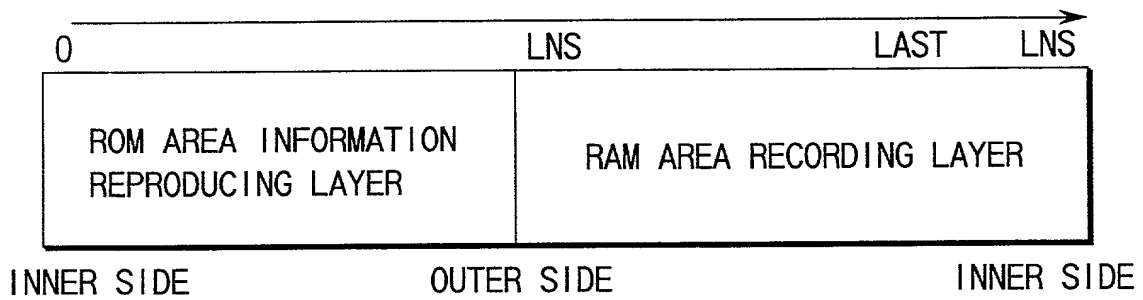


FIG. 34B

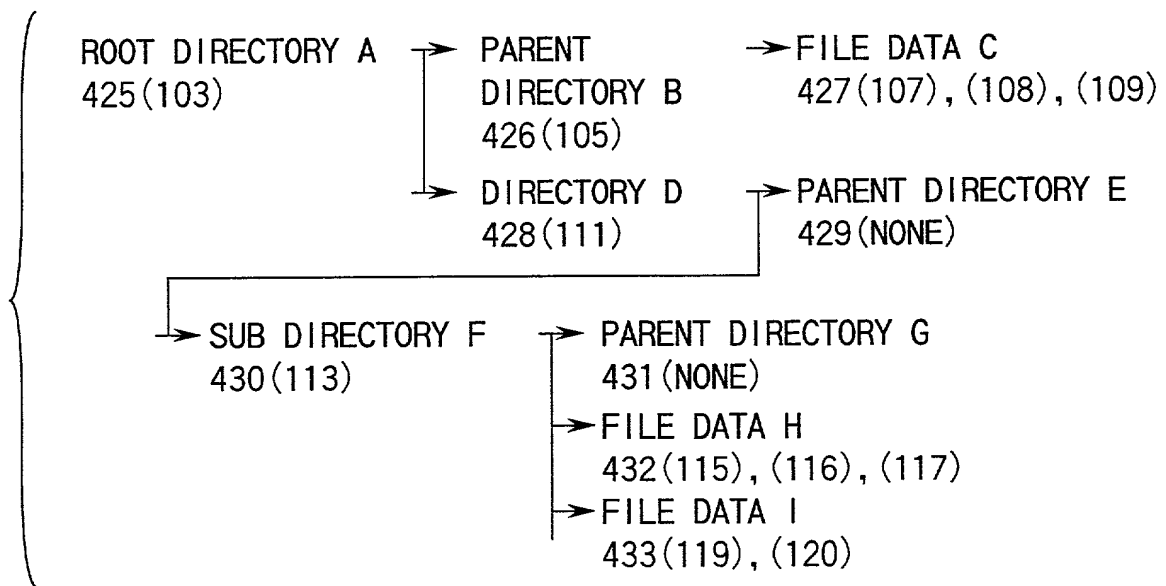


FIG. 35

INFORMATION RECORDING LOCATION	PRE-INITIALIZATION STATE	POST-INITIALIZATION STATE	NOTE
DISK ID ZONE 622 OF REWRITABLE ZONE 613 OF DVDROM LAYER	DESCRIBE LAMINATION STRUCTURE OF RAM LAYER/ROM LAYER AND TOTAL RECORDING CAPACITY + DESCRIBE PRE-INITIALIZATION STATE	DESCRIBE LAMINATION STRUCTURE OF RAM LAYER/ROM LAYER AND TOTAL RECORDING CAPACITY + DESCRIBE DATE OF INITIALIZATION	DESCRIBE REWRITABLE DISK IN BOOK TYPE AND PART VERSION IN CONTROL DATA ZONE IN LEAD-IN AREA
"RESERVE" AREA IN PHYSICAL FORMAT INFORMATION IN CONTROL DATA IN LEAD -IN AREA OF DVDROM LAYER	DISPLAY RANGE OF COPYING FROM DVDROM LAYER TO DVDROM LAYER AT THE TIME OF INITIALIZATION IN PHYSICAL SECTOR OF DVDROM LAYER		DESCRIBE READ-ONLY DISK IN BOOK TYPE AND PART VERSION IN PHYSICAL FORMAT INFORMATION IN CONTROL DATA ZONE IN LEAD-IN AREA
VOLUME RECOGNITION SEQUENCE	RECORDED IN DVDROM LAYER BEFOREHAND → THIS RECORDING POSITION DIFFERS FROM RECORDING POSITION AT THE TIME OF USAGE	COPY THIS INFORMATION IN DVDROM LAYER → START POSITION OF LOGICAL SECTOR NUMBER OF COPY DESTINATION IS "16"	BOOT DESCRIPTOR 447 IN VOLUME RECOGNITION SEQUENCE 44 INDICATES EXECUTION APPLICATION OF ROM LAYER

FIG. 36A

INFORMATION RECORDING LOCATION	PRE-INITIALIZATION STATE	POST-INITIALIZATION STATE	NOTE
FIRST ANCHOR POINT	RECORDED IN DVDROM LAYER BEFOREHAND → DESIGNATION DESTINATION IS DESIGNATED BY LOGICAL SECTOR NUMBER LSN OF RAM LAYER AFTER COPYING	COPY THIS INFORMATION IN DVDROM LAYER → LOGICAL SECTOR NUMBER LSN OF COPY DESTINATION IS "256"	AFTER INITIALIZATION, USE INFORMATION COPIED IN DVDROM LAYER
MAIN VOLUME DESCRIPTOR SEQUENCE	RECORDED IN DVDROM LAYER BEFOREHAND → DESIGNATION DESTINATION IS DESIGNATED BY LOGICAL SECTOR NUMBER OF RAM LAYER AFTER COPYING	COPY THIS INFORMATION IN DVDROM LAYER → LSN OF COPY DESTINATION COINCIDES WITH ACTUAL LSN	AFTER INITIALIZATION, USE INFORMATION COPIED IN DVDROM LAYER
LOGICAL VOLUME INTEGRITY SEQUENCE	RECORDED IN DVDROM LAYER BEFOREHAND	COPY INFORMATION IN DVDROM LAYER	USE INFORMATION COPIED IN DVDROM LAYER
SPACE BIT MAP OR SPACE TABLE	RECORDED IN DVDROM LAYER BEFOREHAND	COPY THIS INFORMATION IN DVDROM LAYER → USE COPIED INFORMATION	SET ALL LOGICAL BLOCK NUMBERS LBN CORRESPONDING TO DVDROM LAYER AS USED

FIG. 36B

INFORMATION RECORDING LOCATION	PRE-INITIALIZATION STATE	POST-INITIALIZATION STATE	NOTE
FILE SET DESCRIPTOR	RECORDED IN DVDROM LAYER BEFOREHAND	COPY THIS INFORMATION IN DVDROM LAYER → USE COPIED INFORMATION	DESIGNATION LOGICAL BLOCK NUMBER LBN HERE DESIGNATES RAM LAYER
FILE ENTRY OF ROOT DIRECTORY	RECORDED IN DVDROM LAYER BEFOREHAND	COPY THIS INFORMATION IN DVDROM LAYER → USE COPIED INFORMATION	DESIGNATION LBN HERE DESIGNATES RAM LAYER
LADS IN ROOT DIRECTORY	RECORDED IN DVDROM LAYER BEFOREHAND, INCLUDING APPLICATION DIRECTORY	COPY INFORMATION IN DVDROM LAYER → USER ADD USING COPIED INFORMATION	FILE ENTRY DESIGNATION LBN DESIGNATES RAM LAYER, INCLUDING APPLICATION DIRECTORY, BEFORE COPYING
APPLICATION EXECUTION FILE INFORMATION	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS RECORDING POSITION DESIGNATION LBN DESIGNATES ROM LAYER

FIG. 37A

INFORMATION RECORDING LOCATION	PRE-INITIALIZATION STATE	POST-INITIALIZATION STATE	NOTE
APPLICATION TEMPLATE DIRECTORY	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS RECORDING POSITION DESIGNATION LBN DESIGNATES ROM LAYER
APPLICATION DATA FILE	NOT RECORDED	NEWLY CREATE ON DVDROM LAYER	CREATE WHEN APPLICATION IS INVOKED
APPLICATION RELATIVE DIRECTORY	RECORDED IN DVDROM LAYER BEFOREHAND	COPY INFORMATION IN DVDROM LAYER → USE COPIED INFORMATION	DESIGNATION LBN HERE DESIGNATES RAM LAYER
SECOND ANCHOR POINT	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS DESIGNATION LBN DESIGNATES RAM LAYER
RESERVE VOLUME DESCRIPTOR SEQUENCE	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS DESIGNATION LBN DESIGNATES RAM LAYER

FIG. 37B

INFORMATION RECORDING LOCATION	PRE-INITIALIZATION STATE	POST-INITIALIZATION STATE	NOTE
DISK ID ZONE 622 OF REWRITABLE ZONE 613 OF DVDROM LAYER	DESCRIBE LAMINATION STRUCTURE OF RAM LAYER/ROM LAYER + DESCRIBE PRE-INITIALIZATION STATE	DESCRIBE LAMINATION STRUCTURE OF RAM LAYER/ROM LAYER + DESCRIBE DATE OF INITIALIZATION	DESCRIBE REWRITABLE DISK IN BOOK TYPE AND PART VERSION IN CONTROL DATA ZONE IN LEAD-IN AREA
"RESERVE" AREA IN PHYSICAL FORMAT INFORMATION IN CONTROL DATA IN LEAD -IN AREA OF DVDROM LAYER	DISPLAY RANGE OF COPYING FROM DVDROM LAYER TO DVDROM LAYER AT THE TIME OF INITIALIZATION IN PHYSICAL SECTOR OF DVDROM LAYER		DESCRIBE READ-ONLY DISK IN BOOK TYPE AND PART VERSION IN PHYSICAL FORMAT INFORMATION IN CONTROL DATA ZONE IN LEAD-IN AREA
VOLUME RECOGNITION SEQUENCE	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS RECORDING POSITION DESIGNATION LBN DESIGNATES ROM LAYER

FIG. 38A

INFORMATION RECORDING LOCATION	PRE-INITIALIZATION STATE	POST-INITIALIZATION STATE	NOTE
FIRST ANCHOR POINT	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS RECORDING POSITION DESIGNATION LBN DESIGNATES ROM LAYER
MAIN VOLUME DESCRIPTOR SEQUENCE	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS RECORDING POSITION DESIGNATION LBN DESIGNATES ROM LAYER
LOGICAL VOLUME INTEGRITY SEQUENCE	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS RECORDING POSITION DESIGNATION LBN DESIGNATES ROM LAYER
SPACE BIT MAP OR SPACE TABLE	RECORDED IN DVDROM LAYER BEFOREHAND	COPY THIS INFORMATION IN DVDROM LAYER → USE COPIED INFORMATION	SET ALL LOGICAL BLOCK NUMBERS LBN CORRESPONDING TO DVDROM LAYER AS USED

FIG. 38B

INFORMATION RECORDING LOCATION	PRE-INITIALIZATION STATE	POST-INITIALIZATION STATE	NOTE
FILE SET DESCRIPTOR	RECORDED IN DVDROM LAYER BEFOREHAND	COPY THIS INFORMATION IN DVDROM LAYER → USE COPIED INFORMATION	DESIGNATION LOGICAL BLOCK NUMBER LBN HERE DESIGNATES RAM LAYER
FILE ENTRY OF ROOT DIRECTORY	RECORDED IN DVDROM LAYER BEFOREHAND	COPY THIS INFORMATION IN DVDROM LAYER → USE COPIED INFORMATION	DESIGNATION LBN HERE DESIGNATES RAM LAYER
LADS IN ROOT DIRECTORY	RECORDED IN DVDROM LAYER BEFOREHAND, INCLUDING APPLICATION DIRECTORY	COPY INFORMATION IN DVDROM LAYER → USER ADD USING COPIED INFORMATION	FILE ENTRY DESIGNATION LBN DESIGNATES RAM LAYER, INCLUDING APPLICATION DIRECTORY, BEFORE COPYING
APPLICATION EXECUTION FILE INFORMATION	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS RECORDING POSITION DESIGNATION LBN DESIGNATES ROM LAYER

FIG. 39A

INFORMATION RECORDING LOCATION	PRE-INITIALIZATION STATE	POST-INITIALIZATION STATE	NOTE
APPLICATION TEMPLATE DIRECTORY	RECORDED IN DVDROM LAYER BEFOREHAND	NOT COPIED	THIS RECORDING POSITION DESIGNATION LBN DESIGNATES ROM LAYER
APPLICATION DATA FILE	NOT RECORDED	NEWLY CREATE ON DVDROM LAYER	CREATE WHEN APPLICATION IS INVOKED
APPLICATION RELATIVE DIRECTORY	RECORDED IN DVDROM LAYER BEFOREHAND	COPY INFORMATION IN DVDROM LAYER → USE COPIED INFORMATION	DESIGNATION LBN HERE DESIGNATES RAM LAYER
SECOND ANCHOR POINT	RECORDED IN DVDROM LAYER BEFOREHAND → DESIGNATION IS DESIGNATED BY LOGICAL SECTOR NUMBER LSN OF RAM LAYER AFTER COPYING	COPY THIS INFORMATION IN DVDROM LAYER → LSN OF COPY DESTINATION IS "LAST LSN-256"	AFTER INITIALIZATION, USE INFORMATION COPIED IN DVDROM LAYER
RESERVE VOLUME DESCRIPTOR SEQUENCE	RECORDED IN DVDROM LAYER BEFOREHAND → DESIGNATION IS DESIGNATED BY LOGICAL SECTOR NUMBER LSN OF RAM LAYER AFTER COPYING	COPY THIS INFORMATION IN DVDROM LAYER → LSN OF COPY DESTINATION COINCIDES WITH ACTUAL LSN	AFTER INITIALIZATION, USE INFORMATION COPIED IN DVDROM LAYER

FIG. 39B


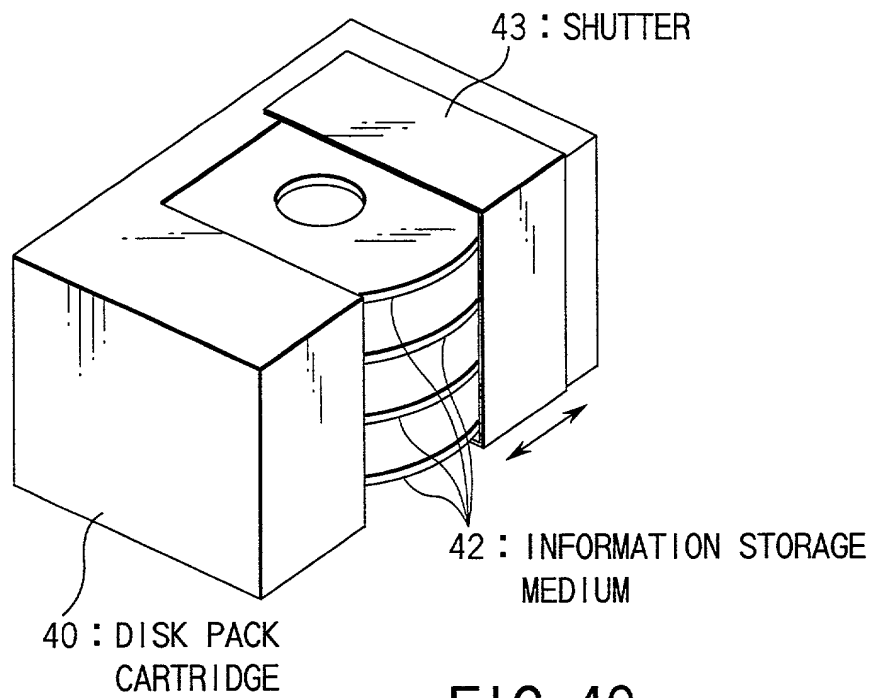


FIG. 40

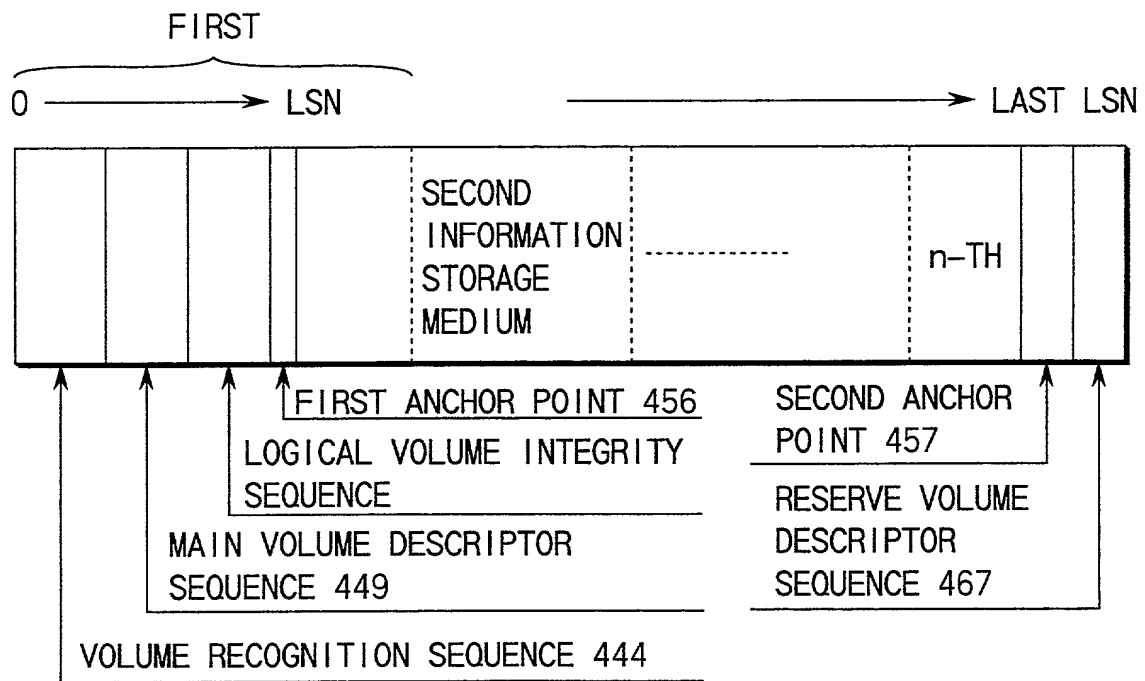

(INSIDE MULTIPLE DISK PACK AS ONE VOLUME)

FIG. 41